

# 2-Color Display

# Digital Flow Switch

Applicable fluid Dry air, N<sub>2</sub>, Ar, CO<sub>2</sub>




\*1 For the PF2M7-L

A wide range of flow measurement is possible with 1 product.

Flow ratio<sup>\*2</sup> **100: 1**

\*2 Excludes the PF2M725 \*3 Made to order (Produced upon receipt of order)

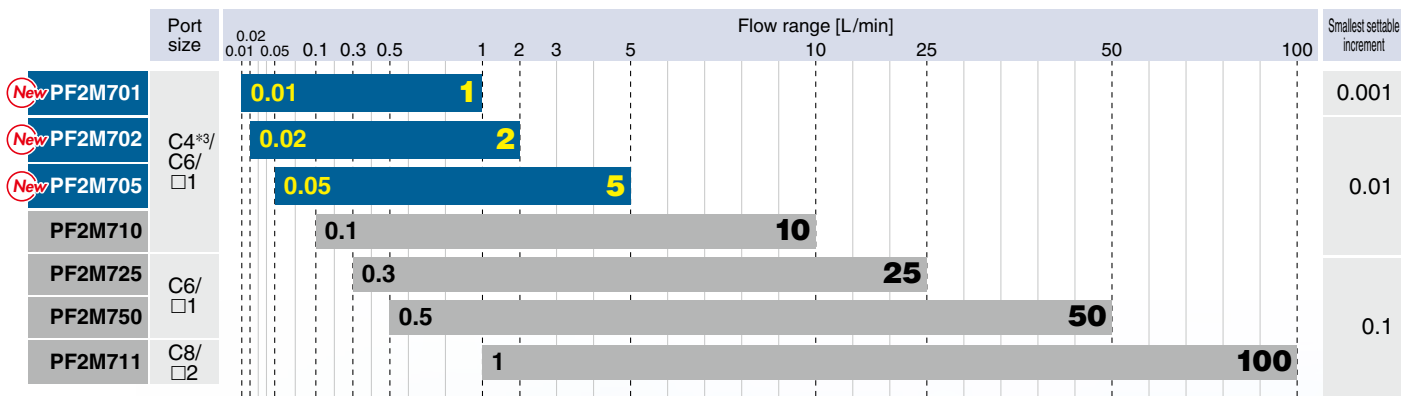

## New IO-Link Compatible

The flow rate value and the device status can be figured out easily via the process data.

PF2M7-L Series [p. 4](#)

**Diagnosis items** Over current error, Outside of rated flow range, Accumulated flow error, Internal product malfunction

**Made to order** Compatible with argon (Ar) and carbon dioxide (CO<sub>2</sub>) mixed gas [p. 23](#)

## Improved resistance to moisture and foreign matter [p. 1](#)

The bypass construction reduces sensor accuracy deterioration and damage.

\* There is no bypass construction for the 1 and 2 L ranges.

## Compact, Lightweight [p. 1](#)

Length Height

**4.7 mm / 4.5 mm shorter**

Weight

**27.3% lighter**

\* Port size: ø6



**New** Female thread piping has been added.

Female thread: 1/8, 1/4 (Rc, NPT, G)




# PF2M7(-L) Series



CAT.ES100-127B

## Improved resistance to moisture and foreign matter


The bypass construction reduces the moist air or foreign matter in contact with the sensor, reducing sensor accuracy deterioration and damage.

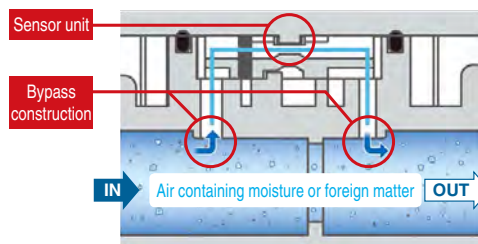

\* There is no bypass construction for the 1 and 2 L ranges.


## Compact, Lightweight

Weight **27.3% lighter** (55 g → 40 g)

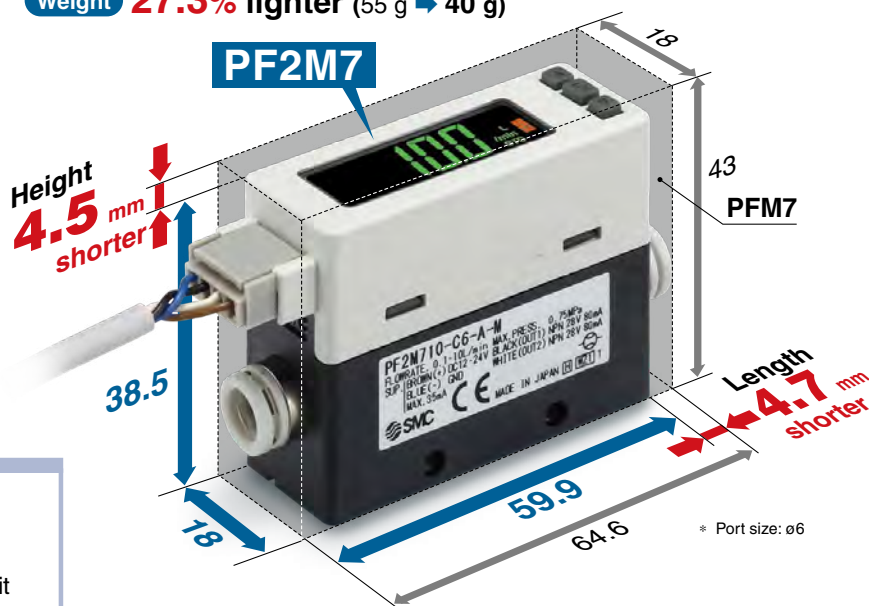

## Reversible display mode

When the product is mounted upside down, the orientation of the display can be rotated to make it easier to read.

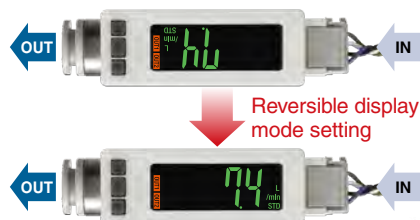

## A flow adjustment valve is integrated into the product.

- Space-saving design
- Reduced piping labor

Flow adjustment valve


## Piping variations

### • One-touch fitting

\* ø4: Made to order (Produced upon receipt of order)



### • Female thread

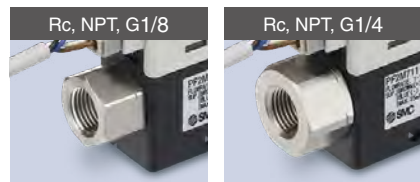


## Display OFF mode



LEDs can be turned off and checked when necessary. The product can also be used as a remote sensor.

## Mounting variations

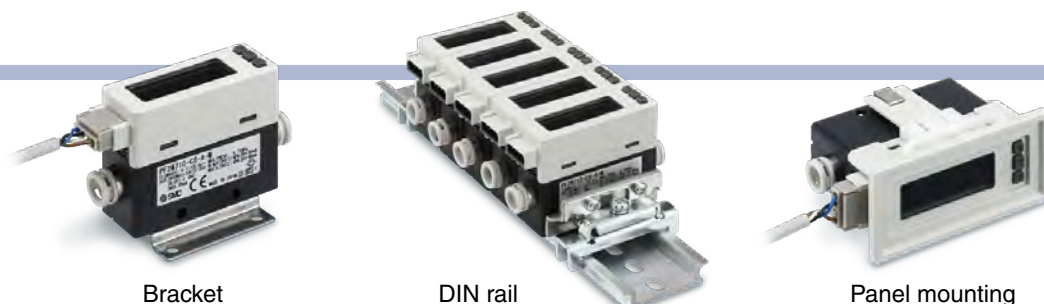

## The digital display allows for the visualization of the flow rate.


**2-color** display, Improved visibility



## Select a model according to the fluid to be used.




## Recommended pneumatic circuit examples

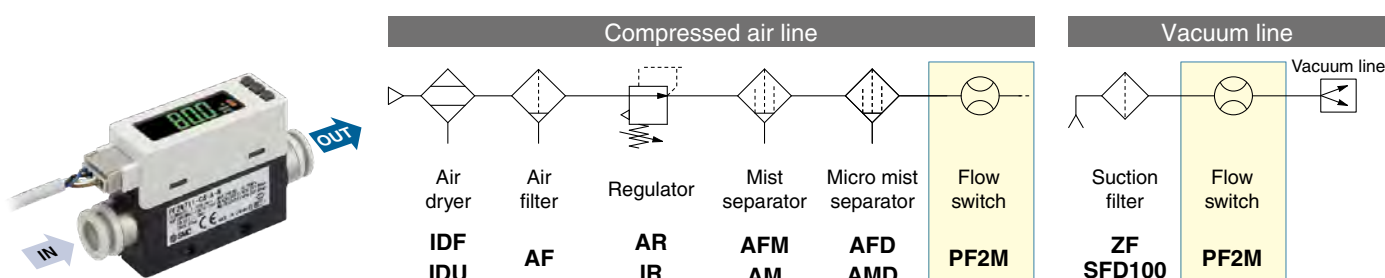

\* Recommended air quality class: JIS B 8392-1 1.1.2 to 1.6.2 (ISO 8753-1 1.1.2 to 1.6.2)

## Analog free span function

The analog span point (5 V (10 V), 20 mA) can be changed within 10 to 105% of the rated flow rate with respect to the displayed value.

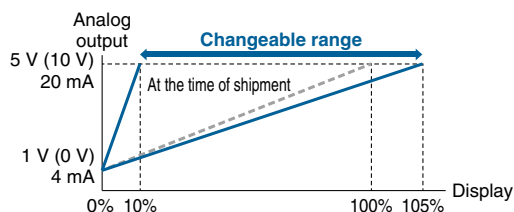

## Delay time setting

**Can be set between 0 and 60 s**

The delay time can be set according to the application.


## Grease-free

## Functions pp. 24, 25

Output operation	Key lock
Forced output	Reset to the default settings
Analog free span	Delay time setting
Display color	Error display
Selection of display OFF mode	Setting of security code
Selectable analog output	Display mode
Reference condition	Display with zero cut-off setting
Peak/Bottom value display	Accumulated value hold
Reversible display	Simple setting
Digital filter setting	Zero clear

### Application example

When 5 V output is required from the flow switch at 75 L/min, use a sensor that outputs 1 to 5 V at 1 to 100 L/min.

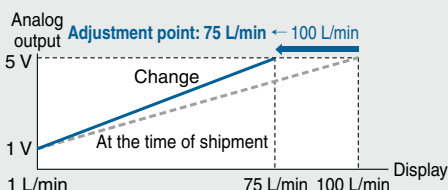

## Selectable analog output function

1 to 5 V or 0 to 10 V can be selected.

## Low current consumption: 35 mA<sup>\*1</sup> or less


\*1 PFM7: 55 mA or less

## Power supply voltage: 12 to 24 V


\* For the IO-Link device: 18 to 30 V



## Select a digital flow switch to increase energy savings!

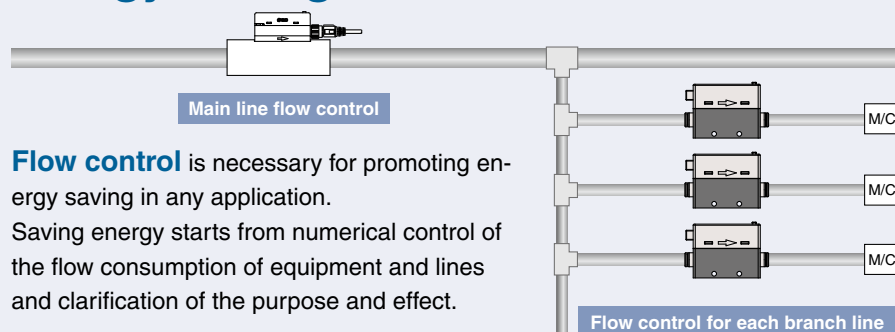


**Flow control** is necessary for promoting energy saving in any application. Saving energy starts from numerical control of the flow consumption of equipment and lines and clarification of the purpose and effect.

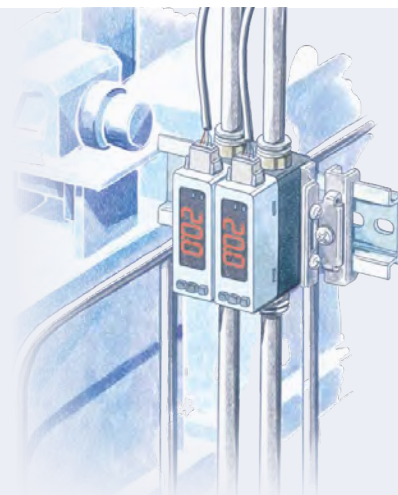


## Applications

### For the control of metal wire tension

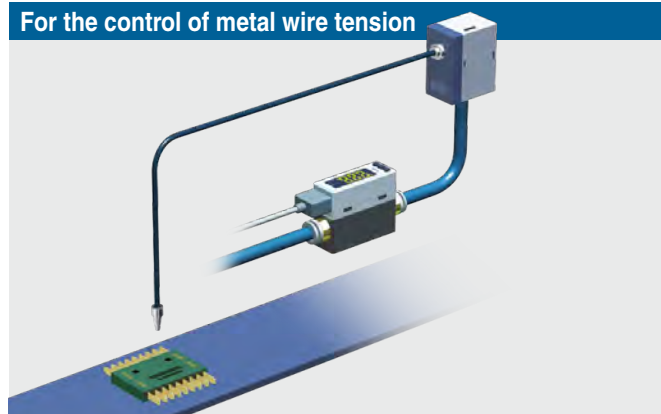


### For air blow


- For flow control of  $N_2$  gas to prevent lead frame oxidation
- $N_2$  blow prevents the distortion of camera images due to air turbulence.

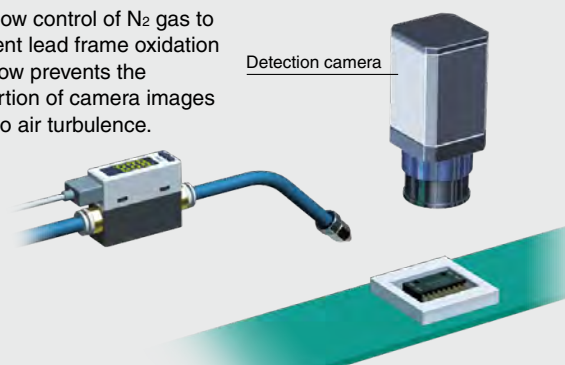


### For welding machines

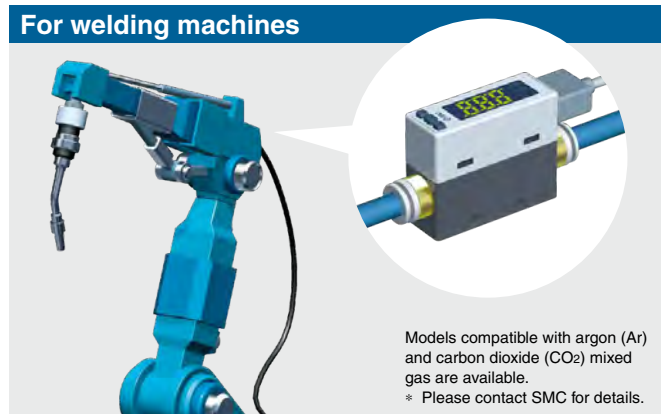


### For $N_2$ gas cylinder peripheral equipment

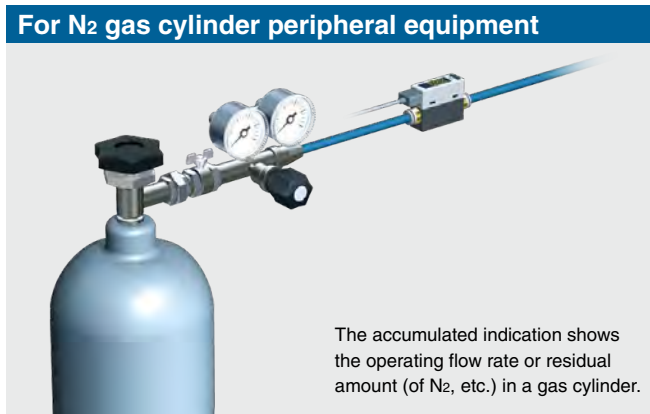

### For suction verification

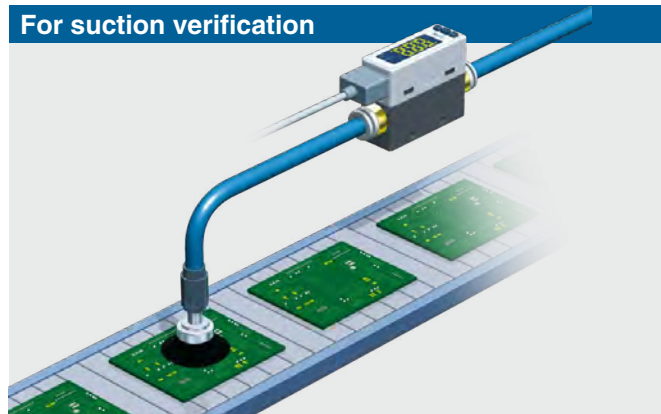


### For leak testers

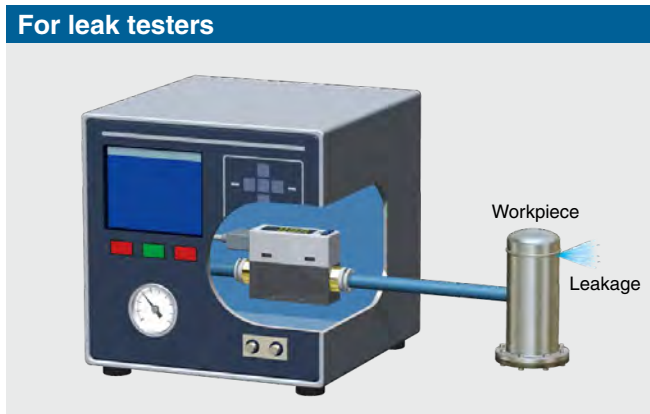

# IO-Link Compatible PF2M7□□-□-L□-□□□

p. 10

## Supports the IO-Link communication protocol

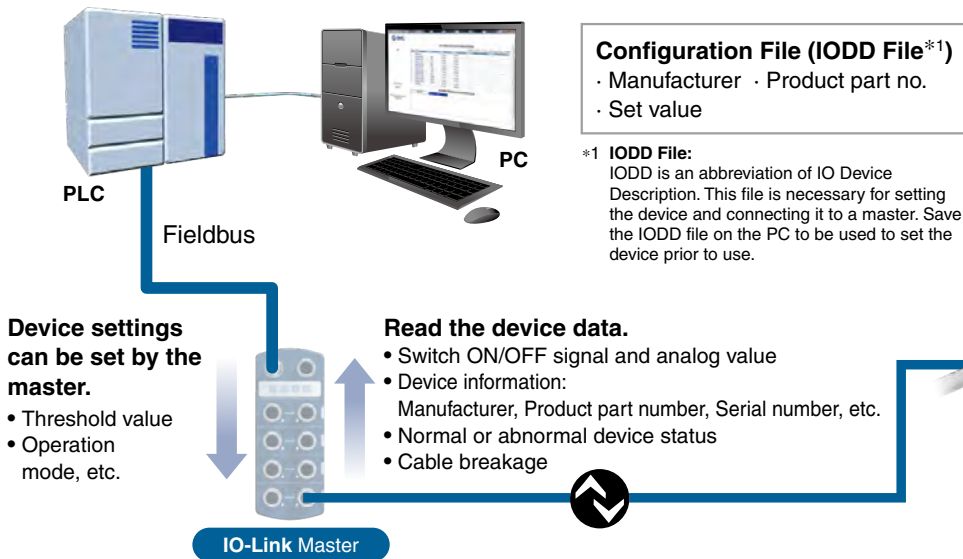

IO-Link is an open communication interface technology between the sensor/actuator and the I/O terminal that is an international standard: IEC61131-9.



**IO-Link Compatible Device: Digital Flow Switch**

## Implement diagnostic bits in the process data.

The diagnostic bit in the cyclic process data makes it easy to find problems with the equipment.

It is possible to find problems with the equipment in real time using the cyclic (periodic) data and to monitor such problems in detail with the noncyclic (aperiodic) data.

### Process Data

Bit offset	Item	Note
0	OUT1 output	0: OFF 1: ON
1	OUT2 output	0: OFF 1: ON
8	Diagnosis (flow rate)	0: OFF 1: ON
14	Fixed output	0: OFF 1: ON
15	Diagnosis (error)	0: OFF 1: ON
16 to 31	Measured flow rate value	Signed 16 bit


Diagnosis items
· Over current error
· Outside of rated flow range
· Accumulated flow error
· Internal product malfunction

Bit offset	31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
Item	Measured flow rate value (PD)															
Bit offset	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Item	Error	Fixed	Reservation				Flow rate		Reservation						OUT2	OUT1
	Diagnosis	Output					Diagnosis								Switch output	



### Application Example

#### For the predictive maintenance of suction verification

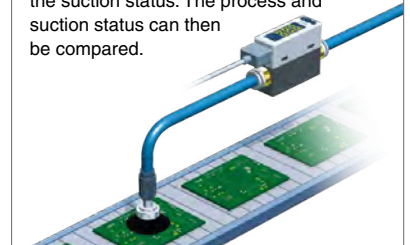The flow rate "switch ON/OFF signals" and "analog values" are monitored to determine the suction status. The process and suction status can then be compared.




## Operation and Display









Communication with master	IO-Link status indicator light	Status		Screen display*2	Description
Yes	 *1	IO-Link mode	Normal	Operate	Normal communication status (readout of measured value)
	Start up			At the start of communication	
	Preoperate				
No	 *1 (Flashing)		Abnormal	Version does not match	The IO-Link version does not match that of the master. The master uses version 1.0.
				Communication disconnection	Normal communication was not received for 1 s or longer.
	OFF	SIO mode		SIO	General switch output

\*1 In IO-Link mode, the IO-Link indicator is ON or flashing.











\*2 "LoC" is displayed when the data storage lock is enabled. (Except for when the version does not match or when in SIO mode)  
The display color can be set to red or green.

# Flow Switch Flow Rate Variations

Series	Applicable fluid	Detection method	Rated flow range [L/min]									
			-3	-2	-1	-0.5	0	0.5	1	2	3	
<b>PFMV</b> 	Dry air N <sub>2</sub>	Thermal type (MEMS)					0	0.5				
							0		1			
							0				3	
					-0.5			0.5				
				-1					1			
			-3									3

Series		Applicable fluid	Detection method	Smallest settable increment	Rated flow range [L/min]																							
	Compatibility with the PFG300 digital flow monitor				0.02 0.01 0.05	0.1	0.3	0.5	1	2	5	10	20	25	50	100	150	200	300	500	600	1000	2000	3000	6000	12000		
<b>PF2M7(-L)</b> 	—	Dry air N <sub>2</sub> Ar CO <sub>2</sub>	Thermal type (MEMS)	0.001 L/min																								
				0.01 L/min																								
0.1 L/min																												
<b>PFMB</b>   <b>PFG300</b>	Dry air N <sub>2</sub>	Thermal type (MEMS) Bypass flow type	1 L/min																									
<b>PFMC</b>   <b>PFG300</b>	Dry air N <sub>2</sub>	Thermal type (MEMS) Bypass flow type	1 L/min																									
<b>PF2A</b> 	—	Air N <sub>2</sub>	Thermal type (Thermistor)	0.1 L/min																								
				0.5 L/min																								
				1 L/min																								
				2 L/min																								
				5 L/min																								
<b>PF3A7□H</b>   <b>PFG300</b>	Air N <sub>2</sub>	Thermal type (Platinum sensor) Bypass flow type	2 L/min																									
			5 L/min																									
			10 L/min																									

# Flow Switch Variations / Basic Performance Table

Series	 <b>PFMV</b>  <b>PFMV3</b>	 <b>PF2M7(-L)</b>	 <b>PFMB</b>  <b>PFG300</b>	 <b>PFMC</b>  <b>PFG300</b>	 <b>PF2A</b>	 <b>PF3A7□H</b>  <b>PFG300</b>
Enclosure	IP40	IP40	IP40	IP65 [Monitor unit IP40]	IP65	IP65 [Monitor unit IP40]
Fluid	Dry air, N <sub>2</sub>	Dry air, N <sub>2</sub> , Ar, CO <sub>2</sub>	Dry air, N <sub>2</sub>	Dry air, N <sub>2</sub>	Air, N <sub>2</sub>	Air, N <sub>2</sub>
Setting	Digital	Digital	Digital	Digital	Digital	Digital
Rated flow range	0 to 0.5 L/min -0.5 to 0.5 L/min 0 to 1 L/min -1 to 1 L/min 0 to 3 L/min -3 to 3 L/min	0.01 to 1 L/min 0.02 to 2 L/min 0.05 to 5 L/min 0.1 to 10 L/min 0.3 to 25 L/min 0.5 to 50 L/min 1 to 100 L/min	2 to 200 L/min 5 to 500 L/min 10 to 1000 L/min 20 to 2000 L/min	5 to 500 L/min 10 to 1000 L/min 20 to 2000 L/min	1 to 10 L/min 5 to 50 L/min 10 to 100 L/min 20 to 200 L/min 50 to 500 L/min	30 to 3000 L/min 60 to 6000 L/min 120 to 12000 L/min
Power supply voltage	12 to 24 VDC ±10%	PF2M7 12 to 24 VDC ±10% PF2M7-L 18 to 30 VDC ±10%	12 to 24 VDC ±10%	12 to 24 VDC ±10%	12 to 24 VDC ±10%	24 VDC ±10%
Temperature characteristics (25°C standard)	±2% F.S. (15 to 35°C) ±5% F.S. (0 to 50°C) [Monitor unit ±0.5% F.S. (0 to 50°C)]	±3% F.S. ±1 digit (15 to 35°C) ±5% F.S. ±1 digit (0 to 50°C)	±2% F.S. (15 to 35°C) ±5% F.S. (0 to 50°C) [Monitor unit ±0.5% F.S. (0 to 50°C)]	±2% F.S. (15 to 35°C) ±5% F.S. (0 to 50°C) [Monitor unit ±0.5% F.S. (0 to 50°C)]	±3% F.S. (15 to 35°C) ±5% F.S. (0 to 50°C)	±5% F.S. (0 to 50°C) [Monitor unit ±0.5% F.S. (0 to 50°C)]
Repeatability	±1% F.S. (Fluid: Dry air) Analog output: ±5% F.S. [Monitor unit ±0.1% F.S. Analog output: ±0.5% F.S.]	±1% F.S. ±1 digit (Fluid: Dry air)	±1% F.S. (Fluid: Dry air) [Monitor unit ±0.1% F.S.]	±1% F.S. (Fluid: Dry air) [Monitor unit ±0.1% F.S.]	±1% F.S. (PF2A7□0) ±2% F.S. (PF2A7□1)	±1% F.S. [Monitor unit ±0.1% F.S.]
Hysteresis	Hysteresis mode: Variable Window comparator mode: Variable	Hysteresis mode: Variable Window comparator mode: Variable	Hysteresis mode: Variable Window comparator mode: Variable	Hysteresis mode: Variable Window comparator mode: Variable	Hysteresis mode: Variable Window comparator mode: Fixed (3 digits)	Hysteresis mode: Variable Window comparator mode: Variable
Output	NPN/PNP open collector Analog voltage output Analog current output	NPN/PNP open collector Accumulated pulse output Analog voltage output Analog current output	NPN/PNP open collector Accumulated pulse output Analog voltage output Analog current output	NPN/PNP open collector Accumulated pulse output Analog voltage output Analog current output	NPN/PNP open collector Accumulated pulse output	NPN/PNP open collector Accumulated pulse output Analog voltage output Analog current output
Display	[Monitor unit 2-color LCD display]	2-color LCD display	2-color LED display 2-color LCD display [Monitor unit 3-color LCD display]	3-color LCD display	LED display	3-color LCD display


\* The monitor unit values are for the PFG300 and PFMV3.





# CONTENTS

## **2-Color Display** Digital Flow Switch *PF2M7(-L) Series*

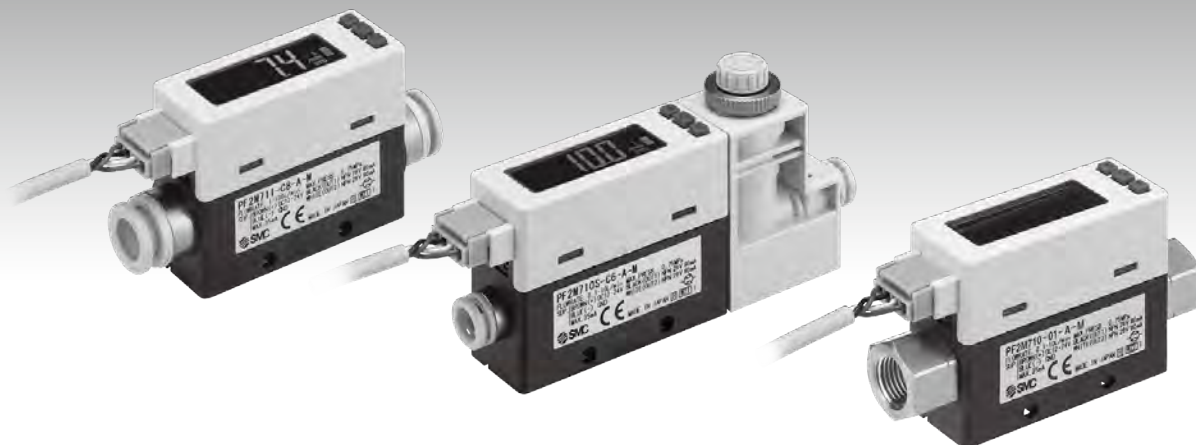

How to Order .....	p. 9
Specifications .....	pp. 11, 12
Set Point Range and Rated Flow Range.....	p. 13
Flow/Analog Output .....	p. 13
Pressure Loss (Reference Data): Without Flow Adjustment Valve .....	p. 14
Flow Rate Characteristics (Reference Data) .....	p. 14
Flow Rate Characteristics at Negative Pressure (Reference Data).....	p. 15
Internal Circuits and Wiring Examples.....	pp. 16, 17
Construction: Parts in Contact with Fluid.....	p. 18
Dimensions.....	p. 19
Made to Order .....	p. 23
Function Details.....	pp. 24, 25
Safety Instructions .....	Back cover

# 2-Color Display Digital Flow Switch

## PF2M7 Series

### How to Order

PF2M 7 10   - C6 - A   - M      

Integrated display • ① ② ③ ④ ⑤ ⑥ ⑦ ⑧

#### ① Rated flow range

01	0.01 to 1 L/min
02	0.02 to 2 L/min
05	0.05 to 5 L/min
10	0.1 to 10 L/min
25	0.3 to 25 L/min
50	0.5 to 50 L/min
11	1 to 100 L/min

#### ② Flow adjustment valve

Nil	None
S	Yes



\* The flow adjustment valve is not available for the 1, 2, and 5 L type products.

#### ③ Port size

Symbol	Port size	Rated flow range						
		01	02	05	10	25	50	11
01	Rc1/8	●	●	●	●	●	●	—
N1	NPT1/8	●	●	●	●	●	●	—
F1	G1/8	●	●	●	●	●	●	—
02	Rc1/4	—	—	—	—	—	—	●
N2	NPT1/4	—	—	—	—	—	—	●
F2	G1/4	—	—	—	—	—	—	●
C4*1	ø4	●	●	●	●	—	—	—
C6	ø6	●	●	●	●	●	●	—
C8	ø8	—	—	—	—	—	—	●

\*1 Made to order (Produced upon receipt of order)

#### Piping variations

With One-touch fitting	Female thread
C4*2, C6, C8	01, 02, N1, N2, F1, F2
	





\*2 Made to order (Produced upon receipt of order)

#### ④ Output specification

Symbol	OUT1	OUT2
A	NPN	NPN
B	PNP	PNP
C	NPN	Analog 1 to 5 V ⇔ Analog 0 to 10 V*3
D	NPN	Analog 4 to 20 mA
E	PNP	Analog 1 to 5 V ⇔ Analog 0 to 10 V*3
F	PNP	Analog 4 to 20 mA



\*3 1 to 5 V or 0 to 10 V can be selected by pressing the button.  
The default setting is 1 to 5 V.

#### ⑦ Option 2

Nil	R	S
Without bracket	Bracket (For the type without a flow adjustment valve) <b>ZS-33-M</b>  With 2 tapping screws * Interchangeable with the existing PFM series	Bracket (For the type with a flow adjustment valve) <b>ZS-33-MS</b>  With 3 tapping screws * Interchangeable with the existing PFM series
T	V	
Panel mount adapter (For the type without a flow adjustment valve) <b>ZS-33-2J</b>  Panel mount adapter Panel mount adapter B Panel Mounting bracket	Panel mount adapter (For the type with a flow adjustment valve) <b>ZS-33-2JS</b>  Panel mount adapter S Panel mount adapter B Panel Mounting bracket	

\* Options are shipped together with the product but do not come assembled.

#### ⑤ Option 1

Nil	W
Lead wire with connector (2 m)  <b>ZS-33-D</b> * Interchangeable with the existing PFM series	Lead wire with connector (2 m) + Connector cover (Silicone rubber) <b>ZS-33-F</b>  <b>ZS-33-D</b> + * Interchangeable with the existing PFM series
N	
Without lead wire with connector	

#### ⑥ Unit specification

M	SI unit only*4
Nil	Unit selection function*5

\*4 Fixed unit: Instantaneous flow: L/min  
Accumulated flow: L

\*5 This product is for overseas use only.  
(The SI unit type is provided for use in Japan in accordance with the New Measurement Act.)  
The unit can be changed.  
Instantaneous flow: L/min ⇔ cfm  
Accumulated flow: L ⇔ ft<sup>3</sup>

#### ⑧ Calibration certificate\*6


Nil	None
A	Yes

\*6 Made to order  
The certificate is in both English and Japanese.

### DIN Rail Mounting Bracket (To Be Ordered Separately)

**ZS-33-R** ③

Stations	
1	1 station
2	2 stations
3	3 stations
4	4 stations
5	5 stations

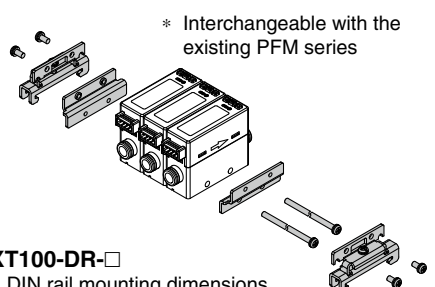

DIN rail part number: AXT100-DR-□

\* Refer to page 22 for the DIN rail mounting dimensions.

## How to Order

**PF2M7** **10** **□** - **C6** - **L** **□** - **M** **□** **□** - **□**  
 Integrated display • 1 2 3 4 5 6 7 8 • Made to order (Refer to page 23.)

### 1 Rated flow range

01	0.01 to 1 L/min
02	0.02 to 2 L/min
05	0.05 to 5 L/min
10	0.1 to 10 L/min
25	0.3 to 25 L/min
50	0.5 to 50 L/min
11	1 to 100 L/min

### 2 Flow adjustment valve

Nil	None
S	Yes

\* The flow adjustment valve is not available for the 1, 2, and 5 L type products.

### 4 Output specification

Symbol	OUT1	OUT2
L	IO-Link/NPN/PNP	—
L2	IO-Link/NPN/PNP	NPN/PNP/External input
L3	IO-Link/NPN/PNP	Analog 1 to 5 V ⇔ Analog 0 to 10 V*3
L4	IO-Link/NPN/PNP	Analog 4 to 20 mA

\*3 1 to 5 V or 0 to 10 V can be selected by pressing the button. The default setting is 1 to 5 V.

### 7 Option 2

Nil	R	S
	<p>Bracket (For the type without a flow adjustment valve)</p> <p><b>ZS-33-M</b></p> <p>Without bracket</p> <p>With 2 tapping screws</p> <p>* Interchangeable with the existing PFM series</p>	<p>Bracket (For the type with a flow adjustment valve)</p> <p><b>ZS-33-MS</b></p> <p>With 3 tapping screws</p> <p>* Interchangeable with the existing PFM series</p>
T	V	
<p>Panel mount adapter (For the type without a flow adjustment valve)</p> <p><b>ZS-33-2J</b></p> <p>Panel mount adapter B</p> <p>Panel mount adapter</p> <p>Panel</p> <p>Mounting bracket</p>	<p>Panel mount adapter (For the type with a flow adjustment valve)</p> <p><b>ZS-33-2JS</b></p> <p>Panel mount adapter B</p> <p>Panel mount adapter S</p> <p>Panel</p> <p>Mounting bracket</p>	

\* Options are shipped together with the product but do not come assembled.

### 3 Port size

Symbol	Port size	Rated flow range						
		01	02	05	10	25	50	11
01	Rc1/8	●	●	●	●	●	●	—
N1	NPT1/8	●	●	●	●	●	●	—
F1	G1/8	—	●	●	●	●	●	—
02	Rc1/4	—	—	—	—	—	—	●
N2	NPT1/4	—	—	—	—	—	—	●
F2	G1/4	—	—	—	—	—	—	●
C4*1	ø4	●	●	●	●	—	—	—
C6	ø6	●	●	●	●	●	—	—
C8	ø8	—	—	—	—	—	—	●

\*1 Made to order (Produced upon receipt of order)

### Piping variations

With One-touch fitting	Female thread
C4*2, C6, C8	01, 02, N1, N2, F1, F2

\*2 Made to order (Produced upon receipt of order)

### 5 Option 1

Nil	W
Lead wire with connector (2 m)	Lead wire with connector (2 m) + Connector cover (Silicone rubber)
<b>ZS-33-D</b> 	<b>ZS-33-F</b>  <b>ZS-33-D</b> +
* Interchangeable with the existing PFM series	* Interchangeable with the existing PFM series
N	Q
Without lead wire with connector	M12 conversion lead wire (0.1 m)

### 6 Unit specification

M	SI unit only*4
Nil	Unit selection function*5

\*4 Fixed unit: Instantaneous flow: L/min  
Accumulated flow: L

\*5 This product is for overseas use only. (The SI unit type is provided for use in Japan in accordance with the New Measurement Act.)  
The unit can be changed.  
Instantaneous flow: L/min ⇔ cfm  
Accumulated flow: L ⇔ ft<sup>3</sup>

### 8 Calibration certificate\*6

Nil	None
A	Yes

\*6 Made to order  
The certificate is in both English and Japanese.


### Made to Order

Symbol	Specification
X731	Compatible with argon (Ar) and carbon dioxide (CO <sub>2</sub> ) mixed gas

For details, refer to page 23.

## DIN Rail Mounting Bracket (To Be Ordered Separately)

Refer to page 9.

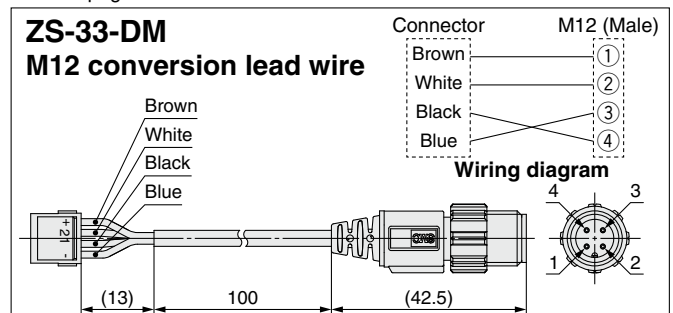

# PF2M7(-L) Series

For flow switch precautions and specific product precautions, refer to the Operation Manual on the SMC website.

## Specifications

Model			PF2M701(-L)	PF2M702(-L)	PF2M705(-L)	PF2M710(-L)	PF2M725(-L)	PF2M750(-L)	PF2M711(-L)
Fluid	Applicable fluid*1		Dry air, N2, Ar, CO2 (JIS B 8392-1 1.1.2 to 1.6.2, ISO 8573-1 1.1.2 to 1.6.2)						
	Fluid temperature range		0 to 50°C						
Flow	Detection method		Thermal type						
	Rated flow range [L/min]	Dry air, N2, Ar	0.01 to 1	0.02 to 2	0.05 to 5	0.1 to 10	0.3 to 25	0.5 to 50	1 to 100
		CO2	0.01 to 0.5	0.02 to 1	0.05 to 2.5	0.1 to 5	0.3 to 12.5	0.5 to 25	1 to 50
	Set point range	Instantaneous flow [L/min]	-0.05 to 1.05	-0.1 to 2.1	-0.25 to 5.25	-0.5 to 10.5	-1.3 to 26.3	-2.5 to 52.5	-5 to 105
		Accumulated flow [L]	0.00 to 9999999.99		0.0 to 99999999.9		0 to 999999999		
	Smallest settable increment	Instantaneous flow [L/min]	0.001	0.01		0.1		1	
		Accumulated flow [L]	0.01		0.1		1		
Accumulated volume per pulse [L/pulse]		0.01				0.1		1	
Accumulated value hold function*2		Intervals of 2 or 5 minutes can be selected.							
Pressure	Operating pressure range		-0.1 to 0.75 MPa						
	Rated pressure range*3		-0.07 to 0.75 MPa						
	Proof pressure		1.0 MPa						
	Pressure loss		Refer to the "Pressure Loss" graph.						
Pressure characteristics		±5% F.S. ±1 digit (0.35 MPa standard)							
Electrical	Power supply voltage*4	For the switch output device	12 to 24 VDC ±10%						
		For the IO-Link device	18 to 30 VDC ±10%						
	Current consumption		35 mA or less						
	Protection		Polarity protection						
Accuracy*5	Display accuracy		±3% F.S. ±1 digit						
	Analog output accuracy		±3% F.S.						
	Repeatability		±1% F.S. ±1 digit (±2% F.S. ±1 digit when the digital filter is set to 0.05 s)						
	Temperature characteristics		±3% F.S. ±1 digit (15 to 35°C: 25°C standard) ±5% F.S. ±1 digit (0 to 50°C: 25°C standard)						
Switch output	Output type		NPN/PNP open collector						
	Output mode		Select from Hysteresis, Window comparator, Accumulated output, Accumulated pulse output, Error output, or Switch output OFF modes.						
	Switch operation		Select from Normal or Reversed output.						
	Max. load current		80 mA						
	Max. applied voltage	Standard	28 VDC (NPN only)						
		IO-Link compatible	30 VDC (NPN only)						
	Internal voltage drop	Standard	NPN: 1 V or less (Load current: 80 mA) PNP: 1.5 V or less (Load current: 80 mA)						
		IO-Link compatible	1.5 V or less (Load current: 80 mA)						
	Response time*6		50 ms or less						
	Delay time*7		Select from 0 to 0.10 s (increment of 0.01 s), 0.1 to 1.0 s (increment of 0.1 s), 1 to 10 s (increment of 1 s), 20 s, 30 s, 40 s, 50 s, or 60 s.						
Hysteresis*8		Variable from 0							
Protection		Short circuit protection							
Analog output*9	Output type		Voltage output: 1 to 5 V (0 to 10 V can be selected)*10, Current output: 4 to 20 mA						
	Impedance	Voltage output	Output impedance: Approx. 1 kΩ						
		Current output	Maximum load impedance: 600 Ω at power supply voltage of 24 V, 300 Ω at power supply voltage of 12 V						
	Response time*6		50 ms ±40%						
Display	Reference condition*11		Select from Standard condition (STD) or Normal condition (NOR).						
	Display mode		Select from Instantaneous flow or Accumulated flow.						
	Unit*12	Instantaneous flow	L/min, cfm						
		Accumulated flow	L, ft³						
	Display range	Instantaneous flow [L/min]	-0.05 to 1.05	-0.1 to 2.1	-0.25 to 5.25	-0.5 to 10.5	-1.3 to 26.3	-2.5 to 52.5	-5 to 105
		Zero cut-off range	0 to ±10% F.S. (Select per 1% F.S. for the maximum rated flow rate.)						
	Accumulated flow [L]*13		0.00 to 9999999.99		0.0 to 99999999.9		0 to 999999999		
Display		LCD, Color: Red/Green, 4 digits, 7 segments							
Indicator LED		LED ON when switch output is ON (OUT1/2: Orange)							
Digital filter*14		Select from 0.05 s, 0.1 s, 0.5 s, 1 s, 2 s, or 5 s.							
Environmental resistance	Enclosure		IP40						
	Withstand voltage		1000 VAC for 1 minute between terminals and housing						
	Insulation resistance		50 MΩ or more (500 VDC measured via megohmmeter) between terminals and housing						
	Operating temperature range		Operating: 0 to 50°C, Stored: -10 to 60°C (No condensation or freezing)						
	Operating humidity range		Operating/Stored: 35 to 85% RH (No condensation or freezing)						
Standards		CE marking (EMC Directive, RoHS Directive)							
Piping*15	Piping specification	One-touch fitting	C4 (ø4)/C6 (ø6)			C6 (ø6)		C8 (ø8)	
		Screw-in (Rc, NPT, G)	01/N1/F1					02/N2/F2	
	Piping entry direction		Straight						
Main materials of parts in contact with fluid			PPS, PBT, FKM, Stainless steel 304, Brass (Electroless nickel plating), Si, Au, GE4F						
Weight	Body	One-touch fitting	40 g						48 g
		Screw-in	60 g						72 g
	Flow adjustment valve		—			+34 g			
	Lead wire		+35 g						
	Bracket		+20 g						
	Panel mount adapter		+15 g						
	DIN rail mounting bracket		+65 g						

- \*1 Refer to the "Recommended pneumatic circuit examples" on page 2.
- \*2 When using the accumulated value hold function, use the operating conditions to calculate the product life, and do not exceed it. The maximum access limit of the memory device is 3.7 million times. If the product is operated 24 hours per day, the product life will be as follows:
  - 5 min interval: life is calculated as 5 min x 3.7 million = 18.5 million min = 35 years
  - 2 min interval: life is calculated as 2 min x 3.7 million = 7.4 million min = 14 years
- \*3 Negative pressure indicates the pressure value on the IN side (inlet side).
- \*4 When multiple products are installed closely, the upper limit of the power supply voltage is 24 VDC.
- \*5 The accuracy value is based on dry air as a fluid. For other fluids, it is a reference value.
- \*6 Value when the digital filter is set at 0.05 s
- \*7 The time from when the instantaneous flow reaches the set value to when the switch output operates can be set.
- \*8 If the flow fluctuates around the set value, the hysteresis must be set to a value more than the fluctuating width. Otherwise, chattering will occur.
- \*9 When using a product with an analog output
- \*10 When selecting 0 to 10 V, refer to the analog output graph for the allowable load current.
- \*11 Standard condition (STD): 20 [°C], 101.3 [kPa] (Absolute pressure), 65 [% RH] (The flow rate given in the specifications is the value under standard conditions.)  
Normal condition (NOR): 0 [°C], 101.3 [kPa] (Absolute pressure), 0 [% RH]
- \*12 Setting is only possible for models with the unit selection function.
- \*13 Power value is displayed for accumulated flow. The first 4 digits of the measurement value are always displayed.
- \*14 The time for the digital filter can be set to the sensor input. The response time indicates when the set value is 90% in relation to the step input.
- \*15 Check the precautions for One-touch fitting before use. When the piping condition is changed, for example due to piping on the back of the product, use a general purpose fitting (KQ□□ series). Some piping conditions may have negative effects on the flow accuracy.
- \* Products with tiny scratches, marks, or display color or brightness variations which do not affect the performance of the product are verified as conforming products.

### Communication Specifications (IO-Link mode)

IO-Link type	Device	
IO-Link version	V1.1	
Communication speed	COM2 (38.4 kbps)	
Minimum cycle time	3.4 ms	
Process data length	Input data: 4 bytes, Output data: 0 byte	
On request data communication	Yes	
Data storage function	Yes	
Event function	Yes	
Vendor ID	131 (0 x 0083)	
Device ID	PF2M701-□-L□-□□□ : 0 x 00016D (365) PF2M701-□-L2□-□□□ : 0 x 00016E (366) PF2M701-□-L3□-□□□ : 0 x 00016F (367) PF2M701-□-L4□-□□□ : 0 x 000170 (368)  PF2M702-□-L□-□□□ : 0 x 000171 (369) PF2M702-□-L2□-□□□ : 0 x 000172 (370) PF2M702-□-L3□-□□□ : 0 x 000173 (371) PF2M702-□-L4□-□□□ : 0 x 000174 (372)  PF2M705-□-L□-□□□ : 0 x 000175 (373) PF2M705-□-L2□-□□□ : 0 x 000176 (374) PF2M705-□-L3□-□□□ : 0 x 000177 (375) PF2M705-□-L4□-□□□ : 0 x 000178 (376)  PF2M710-□-L□-□□□ : 0 x 000179 (377) PF2M710-□-L2□-□□□ : 0 x 00017A (378) PF2M710-□-L3□-□□□ : 0 x 00017B (379) PF2M710-□-L4□-□□□ : 0 x 00017C (380)  PF2M725-□-L□-□□□ : 0 x 00017D (381) PF2M725-□-L2□-□□□ : 0 x 00017E (382) PF2M725-□-L3□-□□□ : 0 x 00017F (383) PF2M725-□-L4□-□□□ : 0 x 000180 (384)  PF2M750-□-L□-□□□ : 0 x 000181 (385) PF2M750-□-L2□-□□□ : 0 x 000182 (386) PF2M750-□-L3□-□□□ : 0 x 000183 (387) PF2M750-□-L4□-□□□ : 0 x 000184 (388)  PF2M711-□-L□-□□□ : 0 x 000185 (389) PF2M711-□-L2□-□□□ : 0 x 000186 (390) PF2M711-□-L3□-□□□ : 0 x 000187 (391) PF2M711-□-L4□-□□□ : 0 x 000188 (392)	



# PF2M7(-L) Series

## Set Point Range and Rated Flow Range

### Set the flow rate within the rated flow range.

The set point range is the range of flow rate that can be set in the switch.

The rated flow range is the range that satisfies the switch specifications (accuracy, linearity, etc.).

It is possible to set a value outside of the rated flow range if it is within the set point range, however, the satisfaction of specifications can not be guaranteed. The flow range if using CO<sub>2</sub> is given in brackets.

Model	Flow range [L/min]									
	-5	0	1	2	5	10	25	50	100	
PF2M701(-L)		0.01 L/min	1.0 L/min (0.5 L/min)							
		-0.05 L/min	1.05 L/min (0.525 L/min)							
		-0.05 L/min	1.05 L/min (0.525 L/min)							
PF2M702(-L)		0.02 L/min	2.0 L/min (1 L/min)							
		-0.1 L/min	2.1 L/min (1.05 L/min)							
		-0.1 L/min	2.1 L/min (1.05 L/min)							
PF2M705(-L)		0.05 L/min	5.0 L/min (2.5 L/min)							
		-0.25 L/min	5.25 L/min (2.63 L/min)							
		-0.25 L/min	5.25 L/min (2.63 L/min)							
PF2M710(-L)		0.1 L/min	10.0 L/min (5 L/min)							
		-0.5 L/min	10.5 L/min (5.25 L/min)							
		-0.5 L/min	10.5 L/min (5.25 L/min)							
PF2M725(-L)		0.3 L/min	25.0 L/min (12.5 L/min)							
		-1.3 L/min	26.3 L/min (13.1 L/min)							
		-1.3 L/min	26.3 L/min (13.1 L/min)							
PF2M750(-L)		0.5 L/min	50.0 L/min (25 L/min)							
		-2.5 L/min	52.5 L/min (26.3 L/min)							
		-2.5 L/min	52.5 L/min (26.3 L/min)							
PF2M711(-L)		1.0 L/min	100.0 L/min (50 L/min)							
	-5.0 L/min		105.0 L/min (52.5 L/min)							
	-5.0 L/min		105.0 L/min (52.5 L/min)							



Rated flow range Set point range Display range

## Flow/Analog Output

	A	B		C
		PF2M701/02/05/10/50/11(-L)	PF2M725(-L)	
Voltage output (1 to 5 V)	1 V	1.04 V	1.05 V	5 V
Current output (4 to 20 mA)	4 mA	4.16 mA	4.19 mA	20 mA

	E	F		G
		PF2M701/02/05/10/50/11(-L)	PF2M725(-L)	
Voltage output (0 to 10 V)*1	0 V	0.10 V	0.12 V	10 V

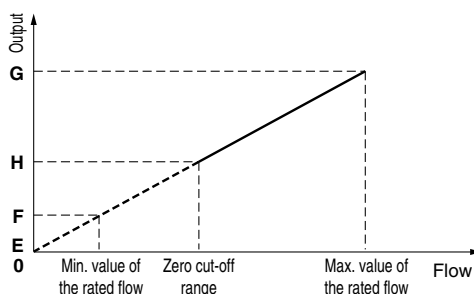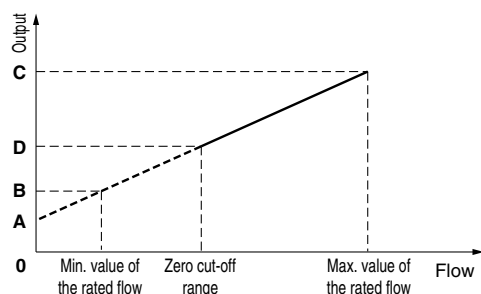


\*1 The analog output current from the connected equipment should be 20  $\mu$ A or less when selecting 0 to 10 V. When 20  $\mu$ A or more current flows, it is possible that the accuracy is not satisfied at less than or equal to 0.5 V.

\* D or H fluctuates depending on the setting of the zero cut-off function.


When the zero cut-off function is set to "0," the flow rate display value starts from 0 L/min., but in conditions other than horizontal installation and supply pressure of 0.35 MPa, the output may not be 0 L/min.

**Pressure Loss (Reference Data): Without Flow Adjustment Valve****PF2M701(-L)**


1 L/min

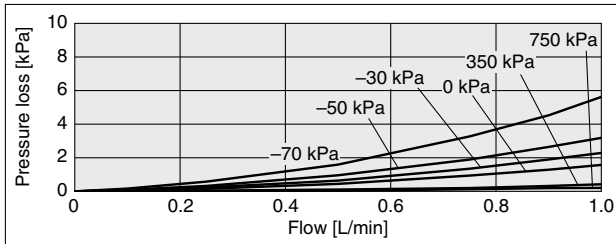**PF2M702(-L)**


2 L/min

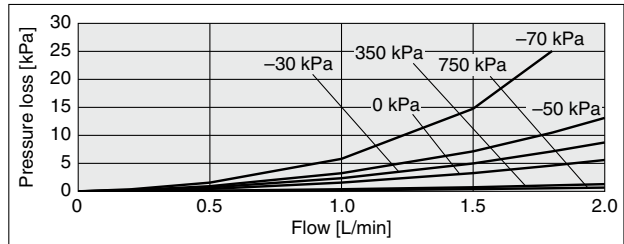**PF2M705(-L)**


5 L/min

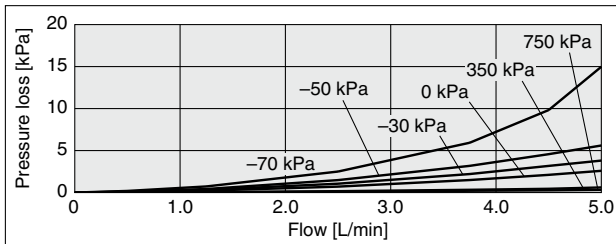**PF2M710(-L)**


10 L/min

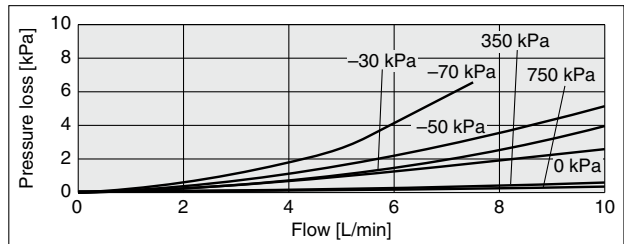**PF2M725(-L)**


25 L/min

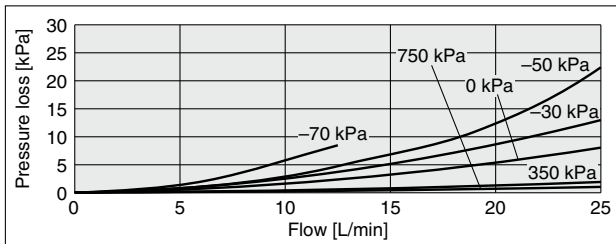**PF2M750(-L)**


50 L/min

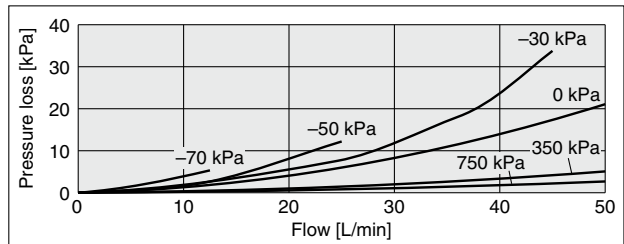**PF2M711(-L)**


100 L/min

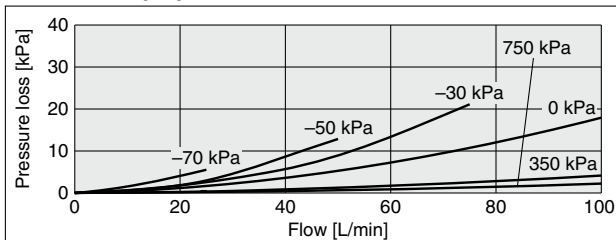**Flow Rate Characteristics (Reference Data)****PF2M710(-L)**


10 L/min

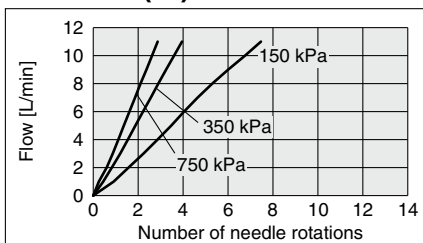**PF2M725(-L)**


25 L/min

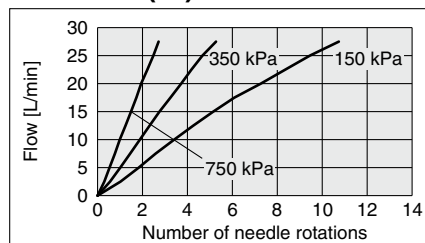**PF2M750(-L)**

50 L/min

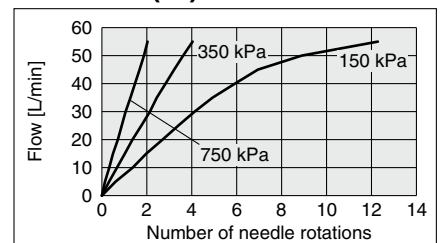**PF2M711(-L)**

100 L/min

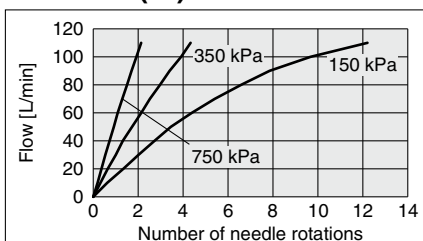


# PF2M7(-L) Series

## Flow Rate Characteristics at Negative Pressure (Reference Data)

When the PF2M series is used with negative pressure (−70 to 0 kPa), the measurable range (warranty range of the specifications including pressure characteristics) varies depending on the flow range. Select the flow range referring to the graph below.


**PF2M701(-L)**

1 L/min

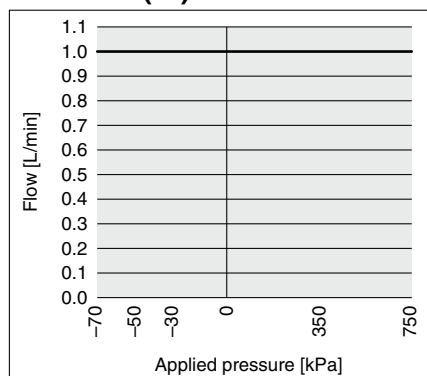


**PF2M702(-L)**

2 L/min

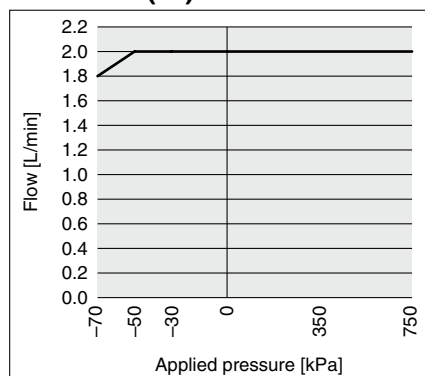


**PF2M705(-L)**

5 L/min

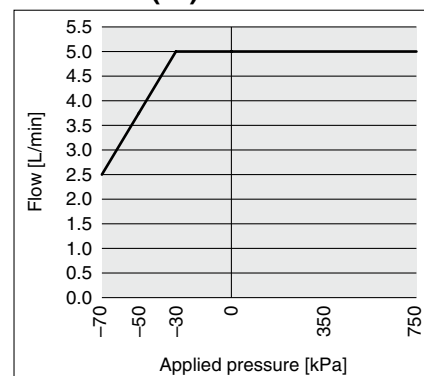


**PF2M710(-L)**

10 L/min

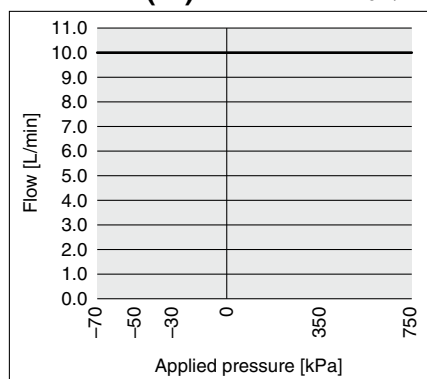


**PF2M725(-L)**

25 L/min

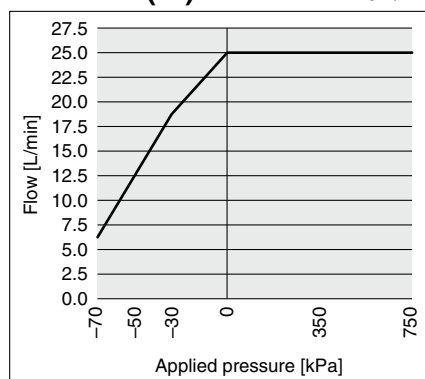


**PF2M750(-L)**

50 L/min

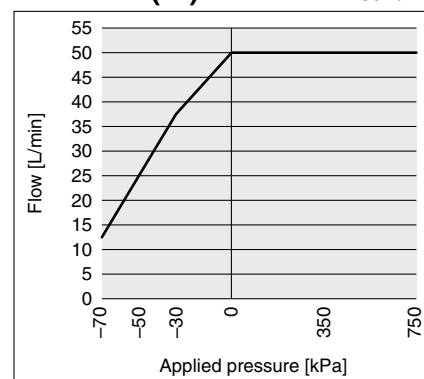

**PF2M711(-L)**


100 L/min

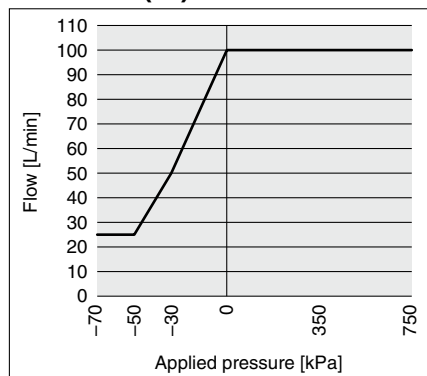

## Internal Circuits and Wiring Examples

### NPN + NPN output type


PF2M7□□-□-A□-□□□

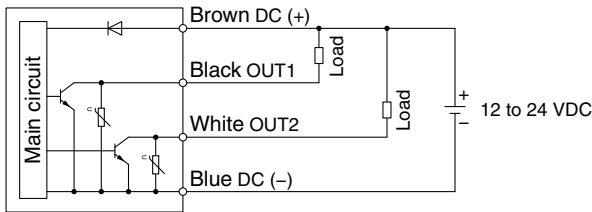

Max. applied voltage: 28 V, Max. load current: 80 mA,  
Internal voltage drop: 1 V or less

### PNP + PNP output type


PF2M7□□-□-B□-□□□

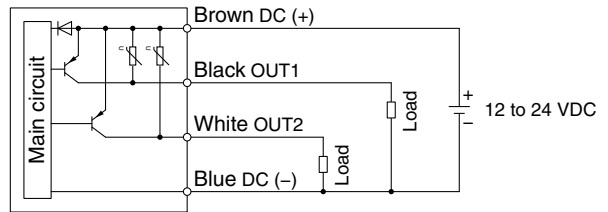

Max. load current: 80 mA, Internal voltage drop: 1.5 V or less

### NPN + Analog output type

PF2M7□□-□-C/D□-□□□

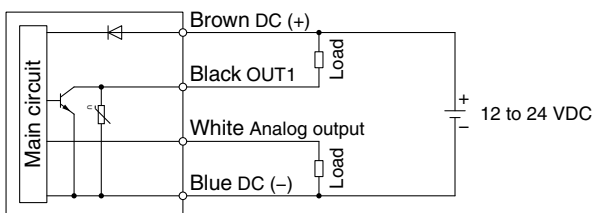

Max. applied voltage: 28 V, Max. load current: 80 mA,  
Internal voltage drop: 1 V or less

**C:** Analog output: 1 to 5 V or 0 to 10 V can be selected.


Output impedance: 1 kΩ

**D:** Analog output: 4 to 20 mA

Load impedance: 50 to 600 Ω

### PNP + Analog output type

PF2M7□□-□-E/F□-□□□

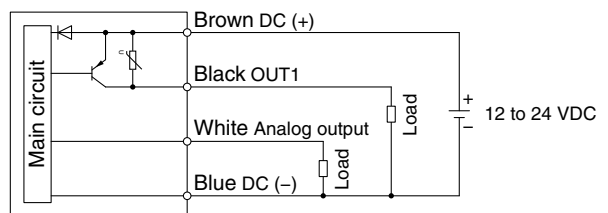

Max. load current: 80 mA, Internal voltage drop: 1.5 V or less

**E:** Analog output: 1 to 5 V or 0 to 10 V can be selected.

Output impedance: 1 kΩ

**F:** Analog output: 4 to 20 mA

Load impedance: 50 to 600 Ω

## Accumulated pulse output wiring examples



### NPN + NPN output type

PF2M7□□-□-A□-□□□

### NPN + Analog output type

PF2M7□□-□-C□-□□□

PF2M7□□-□-D□-□□□

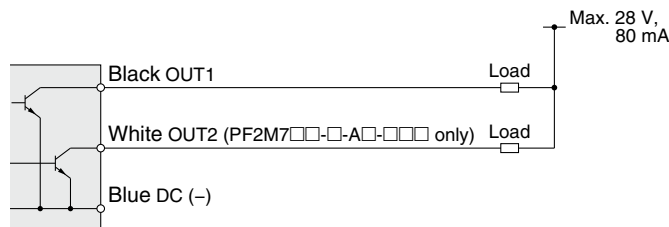



### PNP + PNP output type

PF2M7□□-□-B□-□□□

### PNP + Analog output type

PF2M7□□-□-E□-□□□

PF2M7□□-□-F□-□□□

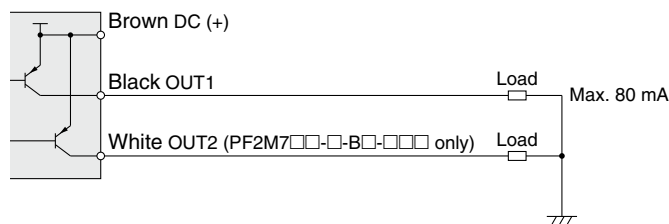


# PF2M7(-L) Series

## Internal Circuits and Wiring Examples


PF2M7□□-□-□□□□

### NPN output type

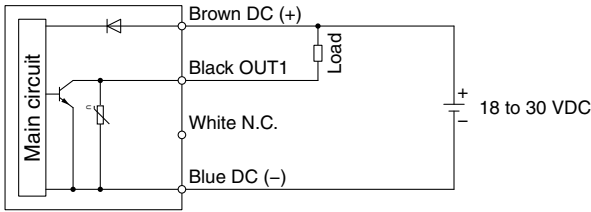

Max. applied voltage: 30 V, Max. load current: 80 mA,  
Internal voltage drop: 1.5 V or less


### PNP output type

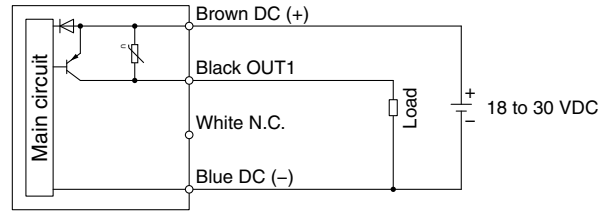

Max. load current: 80 mA, Internal voltage drop: 1.5 V or less


PF2M7□□-□-□L2□□□□

### NPN 2 output type

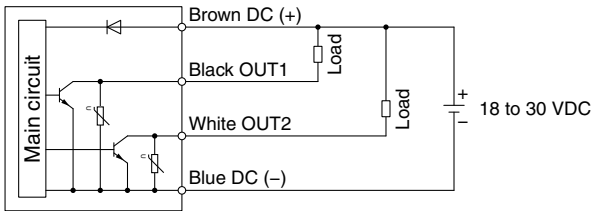


Max. applied voltage: 30 V, Max. load current: 80 mA,  
Internal voltage drop: 1.5 V or less

### PNP 2 output type

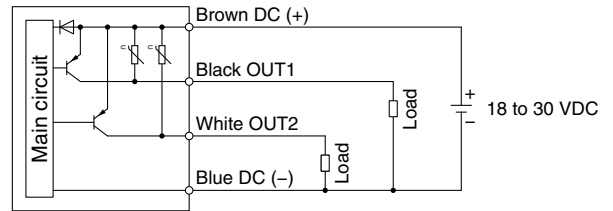


Max. load current: 80 mA, Internal voltage drop: 1.5 V or less

### NPN + External input type

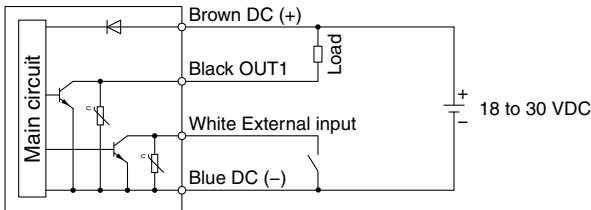

Max. applied voltage: 30 V, Max. load current: 80 mA,  
Internal voltage drop: 1.5 V or less

### PNP + External input type

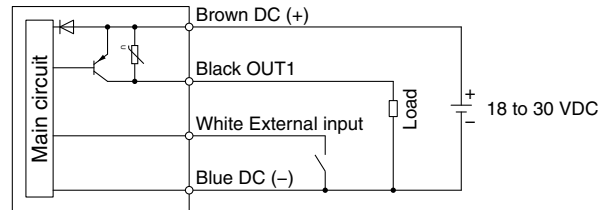


Max. load current: 80 mA, Internal voltage drop: 1.5 V or less

PF2M7□□-□-□L3/4□□□□

### L3: NPN + Analog voltage output type

### L4: NPN + Analog current output type

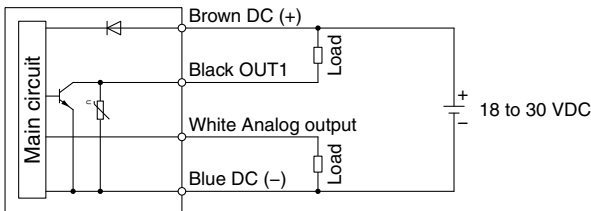


Max. applied voltage: 30 V, Max. load current: 80 mA,  
Internal voltage drop: 1.5 V or less

**L3:** Analog output: 1 to 5 V or 0 to 10 V can be selected.  
Output impedance: 1 kΩ

**L4:** Analog output: 4 to 20 mA  
Load impedance: 50 to 600 Ω

### L3: PNP + Analog voltage output type

### L4: PNP + Analog current output type

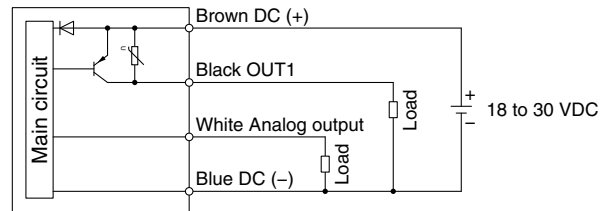


Max. load current: 80 mA, Internal voltage drop: 1.5 V or less

**L3:** Analog output: 1 to 5 V or 0 to 10 V can be selected.  
Output impedance: 1 kΩ

**L4:** Analog output: 4 to 20 mA  
Load impedance: 50 to 600 Ω


### When used as an IO-Link device

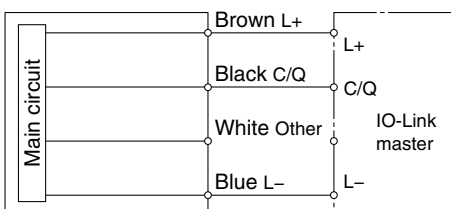




## Construction: Parts in Contact with Fluid


### PF2M701/702/705/710/725/750/711(-L)

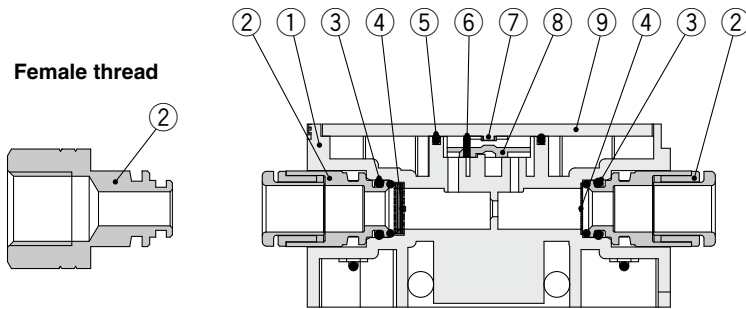


PF2M705/710/725/750-C4/C6(-L)

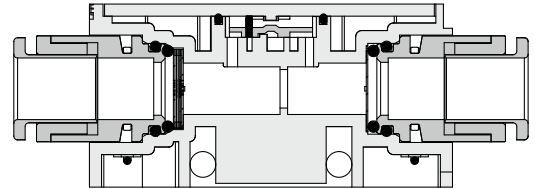

PF2M711-C8(-L)

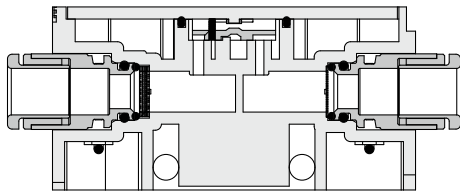

PF2M701/702(-L)

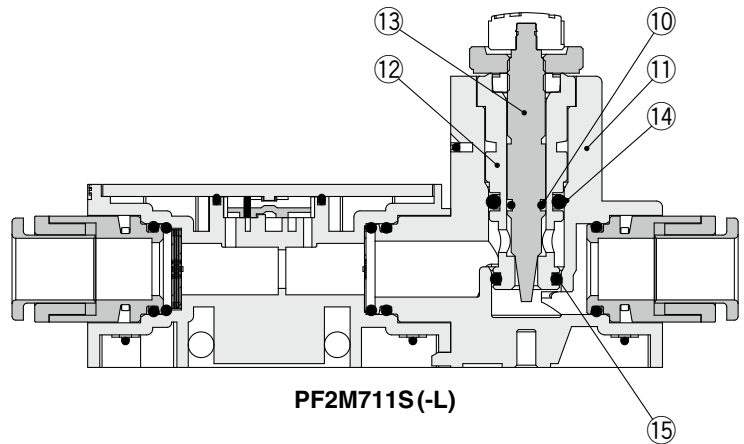

PF2M711S(-L)

\* There is no bypass construction for the 1 and 2 L ranges.



## Component Parts

No.	Description	Material	Note
1	Body	PPS	
2	Fitting for piping	Brass	Electroless nickel plating
3	O-ring	FKM	
4	Flow rectifier	Stainless steel 304	
5	Seal	FKM	
6	Flow rectifier	Stainless steel 304	
7	Sensor chip	Silicon	
8	Body B	PPS	
9	Printed circuit board	GE4F	
10	O-ring	FKM	Fluoro coating
11	Flow adjustment valve body	PBT	
12	Body	Brass	Electroless nickel plating
13	Needle	Brass	Electroless nickel plating
14	O-ring	FKM	Fluoro coating
15	O-ring	FKM	Fluoro coating

# PF2M7(-L) Series



## Dimensions

### PF2M7□-C4/C6/C8(-L)

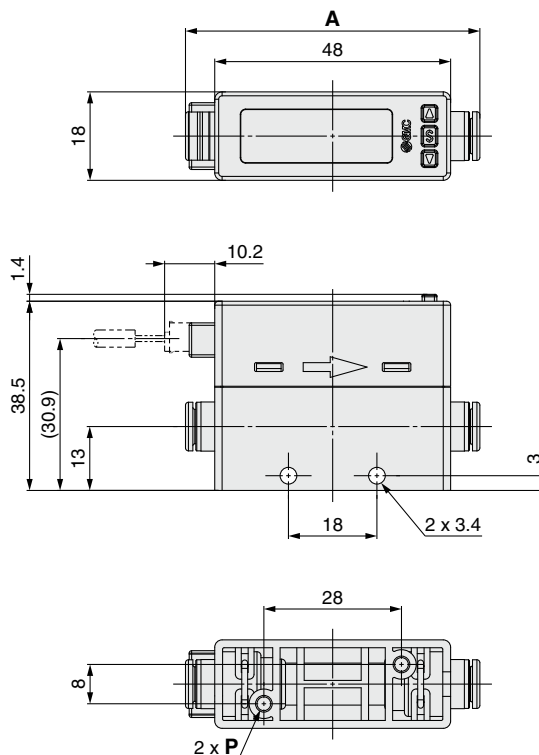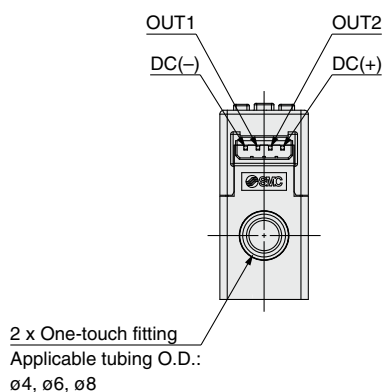

Model	A	P
PF2M701/702/705/710-C4(-L)	59.1	ø2.8 depth 8.4
PF2M701/702/705/710/725/750-C6(-L)	59.9	ø2.8 depth 8.4
PF2M711-C8(-L)	68	ø2.8 depth 6.2


### PF2M7□-□1/2(-L)

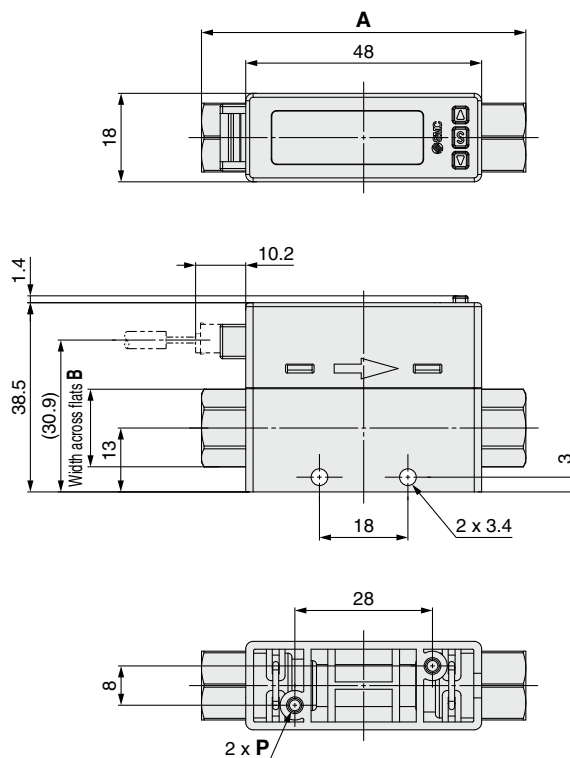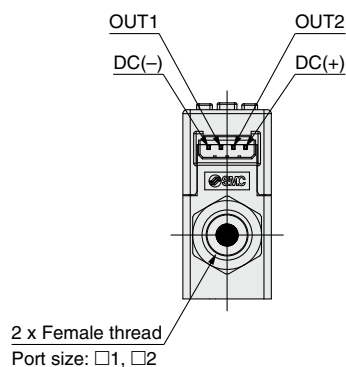


Model	A	B	P
PF2M701/702/705/710/725/750-01(-L)	66	14	ø2.8 depth 8.4
PF2M701/702/705/710/725/750-N1(-L)	68	14	ø2.8 depth 8.4
PF2M701/702/705/710/725/750-F1(-L)	70	14	ø2.8 depth 8.4
PF2M711-02(-L)	70	17	ø2.8 depth 6.2
PF2M711-N2(-L)	70	17	ø2.8 depth 6.2
PF2M711-F2(-L)	78	21	ø2.8 depth 6.2

## Dimensions


### PF2M7□S-C4/C6/C8(-L)

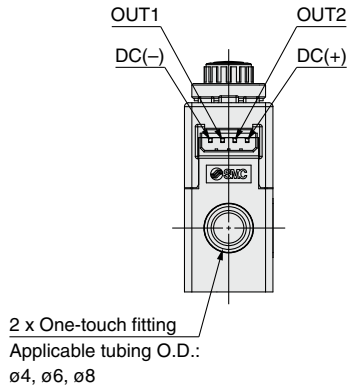


Model	A	P	Q
PF2M710S-C4(-L)	87.1	ø2.8 depth 8.4	ø2.5 depth 6
PF2M710/725/750S-C6(-L)	87.9	ø2.8 depth 8.4	ø2.5 depth 6
PF2M711S-C8(-L)	96	ø2.8 depth 6.2	ø2.5 depth 5

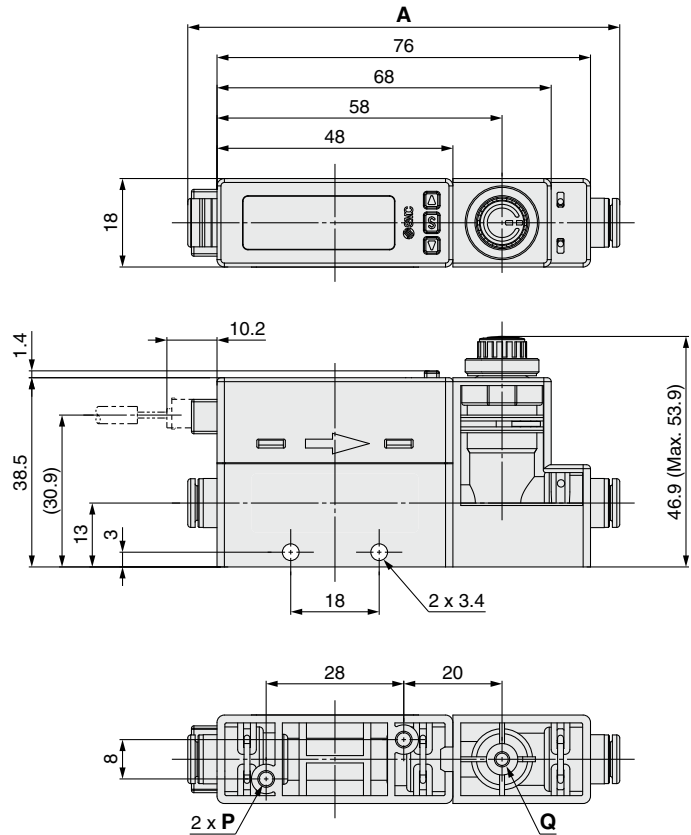

### PF2M7□S-□1/2(-L)

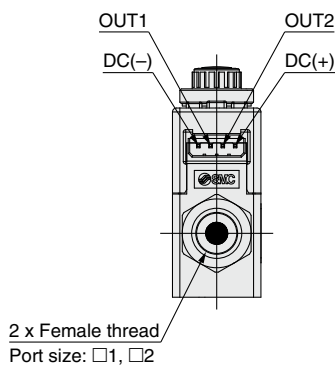

Model	A	B	P	Q
PF2M710/725/750S-01(-L)	94	14	ø2.8 depth 8.4	ø2.5 depth 6
PF2M710/725/750S-N1(-L)	96	14	ø2.8 depth 8.4	ø2.5 depth 6
PF2M710/725/750S-F1(-L)	98	14	ø2.8 depth 8.4	ø2.5 depth 6
PF2M711S-02(-L)	98	17	ø2.8 depth 6.2	ø2.5 depth 5
PF2M711S-N2(-L)	98	17	ø2.8 depth 6.2	ø2.5 depth 5
PF2M711S-F2(-L)	106	21	ø2.8 depth 6.2	ø2.5 depth 5

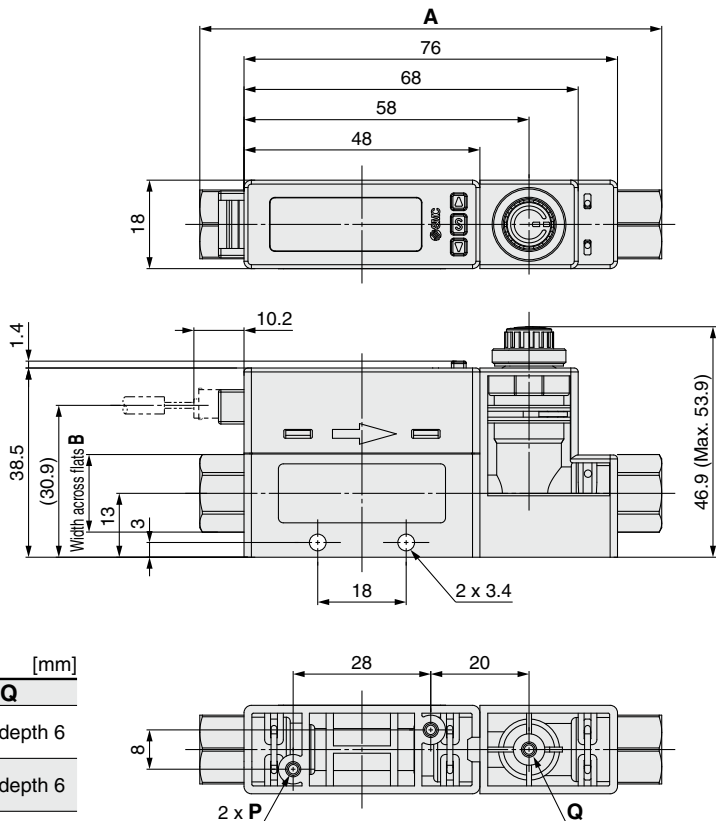


# PF2M7(-L) Series


## Dimensions

### PF2M701/702/705/710/725/750/711(-L)

Panel mounting/Without flow adjustment valve/Straight

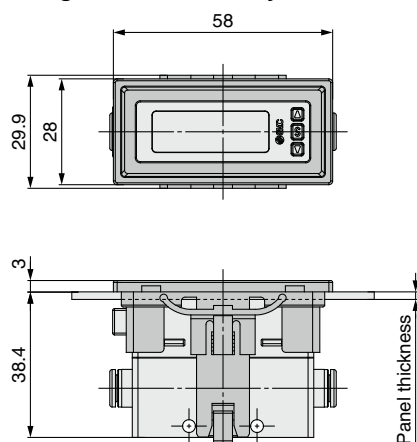


### Panel Fitting Dimensions

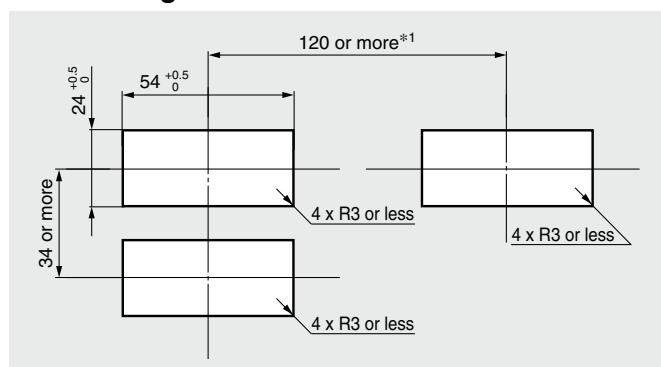


Panel thickness 1 to 3.2 mm

\*1 Port direction: As the piping inlet is straight type, please design the layout with consideration to the tubing and piping materials. If a bend (R) is used, limit it to R3 or less.


With bracket/Without flow adjustment valve

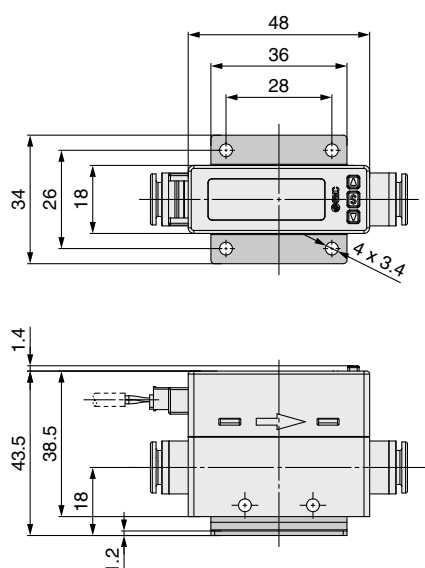

Panel mounting/With flow adjustment valve/Straight

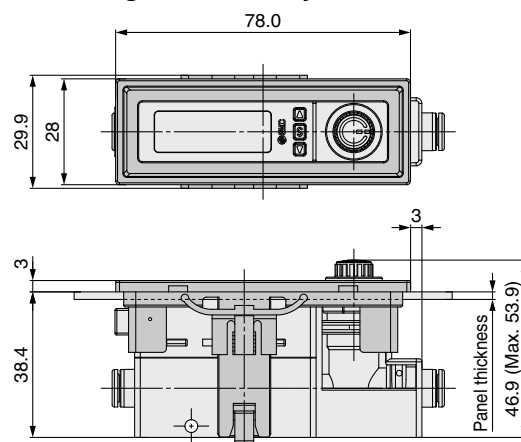


### Panel Fitting Dimensions

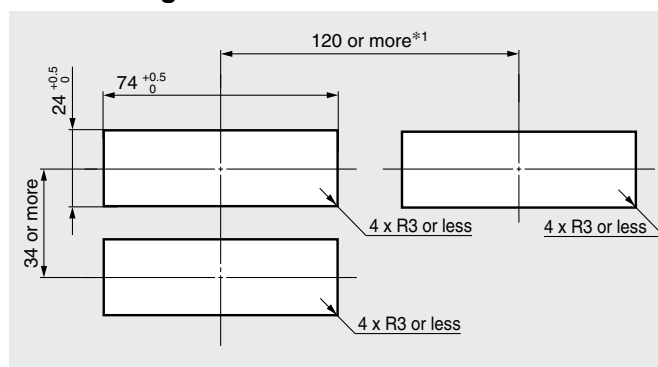

Panel thickness 1 to 3.2 mm

\*1 Port direction: As the piping inlet is straight type, please design the layout with consideration to the tubing and piping materials. If a bend (R) is used, limit it to R3 or less.

With bracket/With flow adjustment valve

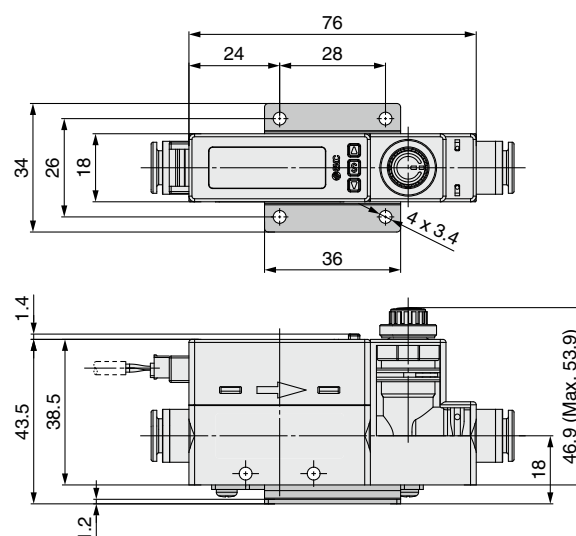


## Dimensions

### PF2M701/702/705/710/725/750/711(-L)

#### DIN rail mounting bracket


ZS-33-R□

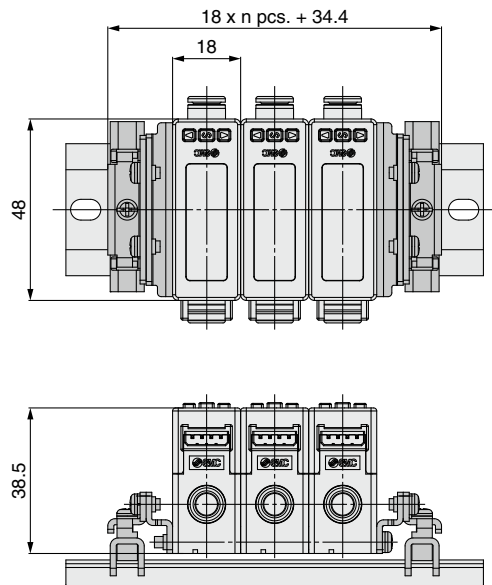

#### DIN rail

AXT100-DR-□

\* For □, enter a number from the No. line in the table below.

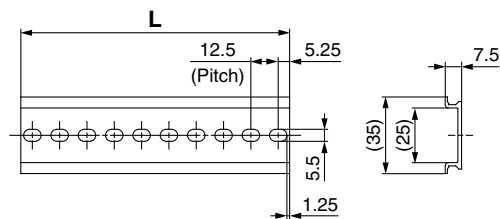


#### L Dimensions [mm]

No.	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
L	23	35.5	48	60.5	73	85.5	98	110.5	123	135.5	148	160.5	173	185.5	198	210.5	223	235.5	248	260.5

#### Lead wire with connector

ZS-33-D

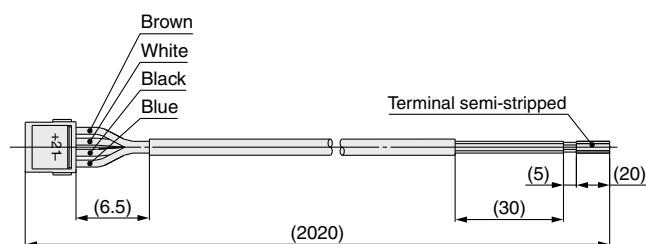

#### Cable Specifications

Conductor	Nominal cross section	AWG 26
	Outside diameter	Approx. 0.50 mm
Insulator	Outside diameter	Approx. 1.00 mm
	Color	Brown, White, Black, Blue
Sheath	Material	Oil-resistant PVC
Finished outside diameter		ø3.5

\* For wiring, refer to the Operation Manual from the SMC website Documents/Download --> Instruction Manuals.



# PF2M7-L Series IO-Link Compatible Products

## Made to Order

Please contact SMC for detailed specifications, delivery times, and prices.



### Compatible with Argon (Ar) and Carbon Dioxide (CO<sub>2</sub>) Mixed Gas

Symbol

**X731**

The argon-carbon dioxide gas ratio (Ar : CO<sub>2</sub>) can be selected using the push-buttons from among the following: 92 : 8, 90 : 10, 80 : 20, 70 : 30, 60 : 40, 40 : 60, and 30 : 70. The dimensions are the same as those of the standard model.

PF2M 7   -  - **L**    - **X731**

7 Integrated display

#### Output specification

Symbol	OUT1	OUT2
<b>L</b>	IO-Link/NPN/PNP	—
<b>L2</b>	IO-Link/NPN/PNP	NPN/PNP/External input
<b>L3</b>	IO-Link/NPN/PNP	Analog 1 to 5 V ⇔ Analog 0 to 10 V
<b>L4</b>	IO-Link/NPN/PNP	Analog 4 to 20 mA

For “How to Order,” refer to page 10.

\* Only applicable to the IO-Link output specification

Model	Gas ratio		Rated flow range	Display/Set point range	Max. analog output	
	Ar	CO <sub>2</sub>			Voltage (Vmax)	Current (Imax)
PF2M701	92%	8%	0.01 to 1 L/min	-0.05 to 1.05 L/min	5 V	20 mA
	90%	10%				
	80%	20%				
	70%	30%	0.01 to 0.6 L/min	-0.03 to 0.63 L/min	5 V	20 mA
	60%	40%				
	40%	60%				
PF2M702	92%	8%	0.02 to 2 L/min	-0.1 to 2.1 L/min	5 V	20 mA
	90%	10%				
	80%	20%				
	70%	30%	0.02 to 1.2 L/min	-0.06 to 1.26 L/min	5 V	20 mA
	60%	40%				
	40%	60%				
PF2M705	92%	8%	0.05 to 5 L/min	-0.25 to 5.25 L/min	5 V	20 mA
	90%	10%				
	80%	20%				
	70%	30%	0.05 to 3 L/min	-0.15 to 3.15 L/min	5 V	20 mA
	60%	40%				
	40%	60%				
PF2M710	92%	8%	0.1 to 10 L/min	-0.5 to 10.5 L/min	5 V	20 mA
	90%	10%				
	80%	20%				
	70%	30%	0.1 to 6 L/min	-0.3 to 6.3 L/min	5 V	20 mA
	60%	40%				
	40%	60%				
PF2M725	92%	8%	0.3 to 25 L/min	-1.3 to 26.3 L/min	5 V	20 mA
	90%	10%				
	80%	20%				
	70%	30%	0.3 to 15 L/min	-0.8 to 15.8 L/min	5 V	20 mA
	60%	40%				
	40%	60%				
PF2M750	92%	8%	0.5 to 50 L/min	-2.5 to 52.5 L/min	5 V	20 mA
	90%	10%				
	80%	20%				
	70%	30%	0.5 to 30 L/min	-1.5 to 31.5 L/min	5 V	20 mA
	60%	40%				
	40%	60%				
PF2M711	92%	8%	1 to 100 L/min	-5 to 105 L/min	5 V	20 mA
	90%	10%				
	80%	20%				
	70%	30%	1 to 60 L/min	-3 to 63 L/min	5 V	20 mA
	60%	40%				
	40%	60%				

\* When changing the max. analog output, use the analog free span function on page 25.

# PF2M7(-L) Series

## Function Details

For setting of functions and operation method, refer to the Operation Manual from the SMC website Documents/Download --> Instruction Manuals.

### Output operation

The output operation can be selected from the following:

Output corresponding to instantaneous flow (Hysteresis mode, Window comparator mode)

- Hysteresis mode is the mode where the switch output will turn ON when the flow is greater than the set value, and will turn OFF when the flow falls below the set value by the amount of hysteresis or more.
- Window comparator mode is the mode where an operating mode in which the switch output is turned on and off depending on whether the flow is inside or outside the range of two set values.

Output corresponding to accumulated flow (Accumulated output mode, Accumulated pulse output mode)

- In accumulated output mode, the switch output will start at the set accumulated flow rate value.
- Accumulated pulse output is a pulse signal which is output every time a predefined accumulated flow has passed.

Others (Error output, Switch output OFF)

- The error output function outputs the switch output when an error is displayed.
- The switch output off function turns off the switch output.

\* Default setting: Hysteresis mode, Normal output

### Simple setting mode

Only the set values for instantaneous flow and accumulated flow can be changed. Output mode, output type, display color, and accumulate pulse output cannot be changed.

### Display color

The display color can be selected for each output condition. The selection of the display color provides visual identification of abnormal values.

Green for ON, Red for OFF
Red for ON, Green for OFF
Red all the time
Green all the time

### Reference condition

The display unit can be selected from standard condition or normal condition.

Standard condition: Flow rate converted to a volume at 20°C, 101.3 kPa (absolute pressure), and 65% RH
Normal condition: Flow rate converted to a volume at 0°C, 101.3 kPa (absolute pressure), and 0% RH

### Delay time setting

The time from when the instantaneous flow reaches the set value to when the switch output operates can be set. Setting the delay time can prevent the switch output from chattering.

The total switching time is the switch operation time and the set delay time. (Default setting: 0 s)

0 to 0.10 s (increment of 0.01 s)
0.1 to 1.0 s (increment of 0.1 s)
1 to 10 s (increment of 1 s)
20 s
30 s
40 s
50 s
60 s

### Digital filter setting

The time for the digital filter can be set to the sensor input. Setting the digital filter can reduce chattering of the switch output and flickering of the analog output and the display.

The response time indicates when the set value is 90% in relation to the step input. (Default setting: 1 s)

0.05 s
0.1 s
0.5 s
1 s
2 s
5 s

### Selectable analog output function

1 to 5 V or 0 to 10 V can be selected for the analog voltage output type. (Default setting: 1 to 5 V)

### Forced output function

The output is turned on/off in a fixed state when starting the system or during maintenance. This enables the confirmation of wiring and prevents system errors due to unexpected output.

For the analog output type: When ON, the output will be 5 V (or 10 V when 0 to 10 V is selected) or 20 mA, and when OFF, 1 V (or 0 V when 0 to 10 V is selected) or 4 mA.

\* Also, an increase or decrease of the flow will not change the on/off status of the output while the forced output function is activated.

### Accumulated value hold

The accumulated value will be stored even if the power supply is turned off. The accumulated value is memorized every 2 or 5 minutes during measurement and continues from the last memorized value when the power supply is turned on again.

The maximum writable limit of the memory device is 3.7 million times, which should be taken into consideration.

### Peak/Bottom value display

The maximum (minimum) flow rate is detected and updated from when the power supply is turned on. In peak (bottom) value display mode, this maximum (minimum) flow rate is displayed.

### Display OFF mode

This function will turn the display OFF. In this mode, “— —” will flash on the main screen. If any button is pressed during this mode, the display reverts to normal for 30 seconds to allow checking of the flow, etc.

### Setting of security code

The user can select whether a security code must be entered to release the key lock. At the time of factory shipment, it is set so that a security code is not required.

### Key-lock function


Prevents operation errors such as accidentally changing setting values

### Reset to the default settings

The product can be returned to its factory default settings.

### Reversible display mode

When the switch is used upside down, the orientation of the display can be rotated to make it easier to read by using the reversible display function.

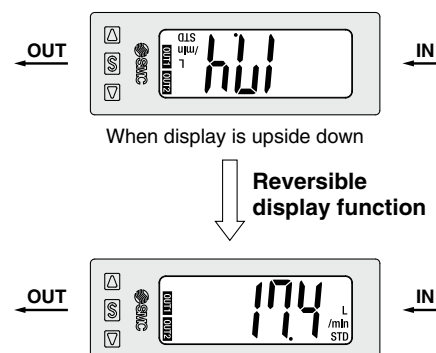

### Zero cut-off function

When the flow is close to 0 L/min, the product will round the value down and zero will be displayed. A flow value may be displayed even when the flow rate is 0 L/min due to high pressure or depending on the installation. The zero cut-off function will force the display to zero.

### Zero-clear function


The measured flow rate indication can be adjusted to zero.

The adjustment range is  $\pm 5\%$  F.S. of the initial factory setting.

# PF2M7(-L) Series

## ■ Analog free span function

This function allows a flow that generates an output of 5 V (or 10 V when 0 to 10 V is selected) or 20 mA to be changed.  
The value can be changed between 10% of the maximum value of the rated flow and the maximum value of the display range.

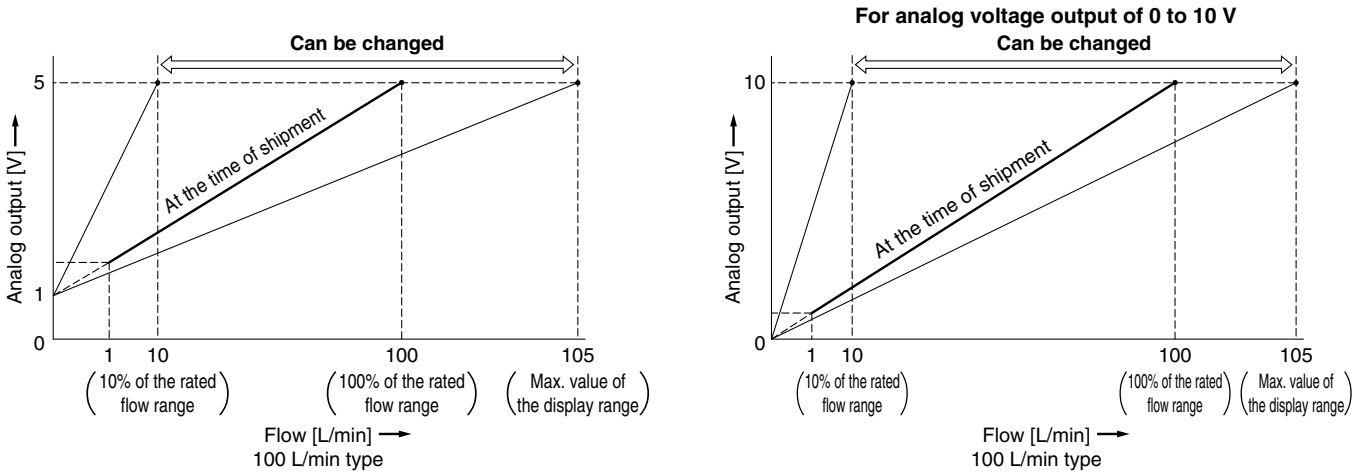

## ■ Error display function

When an error or abnormality arises, the location and contents are displayed.

Display	Error name	Description	Action
Er 1	OUT1 over current error	The switch output (OUT1) load current of 80 mA or more flows.	Turn the power OFF and remove the cause of the over current. Then turn the power ON again.
Er 2	OUT2 over current error	The switch output (OUT2) load current of 80 mA or more flows.	
HHH	Instantaneous flow error	The flow has exceeded the upper limit of the flow display range.	Decrease the flow rate.
LLL		The flow has exceeded the lower limit of the flow display range.	Change the flow to the correct direction.
999	Accumulated flow error*1	The accumulated flow has exceeded the accumulated flow range. (For accumulated increment) (The decimal point position varies depending on the flow range or measurement unit setting.)	Reset the accumulated flow. (Press the SET and DOWN buttons simultaneously for 1 second or longer.)
0		The accumulated flow has reached the set accumulated flow value. (For accumulated decrement) (The decimal point position varies depending on the flow range or measurement unit setting.)	
Er 3	Outside of zero-clear range	During zero-clear operation, the flow rate of $\pm 5\%$ F.S. or more is applied. (The mode is returned to measurement mode after 1 second.)	Retry the zero-clear operation without applying fluid.
Er 0	System error	An internal data error has occurred.	Turn the power OFF and turn it ON again.
Er 4			
Er 6			
Er 7			
Er 8			
Er 14			
Er 16			
Er 40			
Er 15	Version does not match*2	The IO-Link version does not match that of the master. The master uses version 1.0.	Ensure that the master IO-Link version matches the device version.

\*1 A decimal point will be displayed depending on the flow range or measurement unit setting.  
\*2 Only for the IO-Link compatible products  
\* If the error cannot be solved after the instructions above are performed, please contact SMC for investigation.


## ■ Unit display function


The unit displayed on the screen differs depending on the unit setting in measurement mode.


Standard condition (STD)	Instantaneous flow unit L/min	Accumulated flow unit L
 [STD] turns on.	 [L] and [/min] turn on.	 [L] turns on. At the upper right of the display, the index [x10 <sup>3</sup> ] or [x10 <sup>6</sup> ] will turn on based on the accumulated flow.
Normal condition (nor)	Instantaneous flow unit CFM	Accumulated flow unit ft <sup>3</sup>
 [STD] turns off.	 [L] turns off and [/min] turns on.	 [L] turns off. At the upper right of the display, the index [x10 <sup>3</sup> ] or [x10 <sup>6</sup> ] will turn on based on the accumulated flow.

## Safety Instructions

These safety instructions are intended to prevent hazardous situations and/or equipment damage. These instructions indicate the level of potential hazard with the labels of “**Caution**,” “**Warning**” or “**Danger**.” They are all important notes for safety and must be followed in addition to International Standards (ISO/IEC)\*1), and other safety regulations.

 **Caution:** **Caution** indicates a hazard with a low level of risk which, if not avoided, could result in minor or moderate injury.

 **Warning:** **Warning** indicates a hazard with a medium level of risk which, if not avoided, could result in death or serious injury.

 **Danger:** **Danger** indicates a hazard with a high level of risk which, if not avoided, will result in death or serious injury.

- \*1) ISO 4414: Pneumatic fluid power – General rules relating to systems.  
ISO 4413: Hydraulic fluid power – General rules relating to systems.  
IEC 60204-1: Safety of machinery – Electrical equipment of machines.  
(Part 1: General requirements)  
ISO 10218-1: Manipulating industrial robots – Safety.  
etc.

### Warning

#### 1. The compatibility of the product is the responsibility of the person who designs the equipment or decides its specifications.

Since the product specified here is used under various operating conditions, its compatibility with specific equipment must be decided by the person who designs the equipment or decides its specifications based on necessary analysis and test results. The expected performance and safety assurance of the equipment will be the responsibility of the person who has determined its compatibility with the product. This person should also continuously review all specifications of the product referring to its latest catalog information, with a view to giving due consideration to any possibility of equipment failure when configuring the equipment.

#### 2. Only personnel with appropriate training should operate machinery and equipment.

The product specified here may become unsafe if handled incorrectly. The assembly, operation and maintenance of machines or equipment including our products must be performed by an operator who is appropriately trained and experienced.

#### 3. Do not service or attempt to remove product and machinery/equipment until safety is confirmed.

1. The inspection and maintenance of machinery/equipment should only be performed after measures to prevent falling or runaway of the driven objects have been confirmed.
2. When the product is to be removed, confirm that the safety measures as mentioned above are implemented and the power from any appropriate source is cut, and read and understand the specific product precautions of all relevant products carefully.
3. Before machinery/equipment is restarted, take measures to prevent unexpected operation and malfunction.

#### 4. Contact SMC beforehand and take special consideration of safety measures if the product is to be used in any of the following conditions.

1. Conditions and environments outside of the given specifications, or use outdoors or in a place exposed to direct sunlight.
2. Installation on equipment in conjunction with atomic energy, railways, air navigation, space, shipping, vehicles, military, medical treatment, combustion and recreation, or equipment in contact with food and beverages, emergency stop circuits, clutch and brake circuits in press applications, safety equipment or other applications unsuitable for the standard specifications described in the product catalog.
3. An application which could have negative effects on people, property, or animals requiring special safety analysis.
4. Use in an interlock circuit, which requires the provision of double interlock for possible failure by using a mechanical protective function, and periodical checks to confirm proper operation.

### Caution

#### 1. The product is provided for use in manufacturing industries.

The product herein described is basically provided for peaceful use in manufacturing industries.

If considering using the product in other industries, consult SMC beforehand and exchange specifications or a contract if necessary.  
If anything is unclear, contact your nearest sales branch.

## Limited warranty and Disclaimer/ Compliance Requirements

The product used is subject to the following “Limited warranty and Disclaimer” and “Compliance Requirements”.

Read and accept them before using the product.

### Limited warranty and Disclaimer

1. The warranty period of the product is 1 year in service or 1.5 years after the product is delivered, whichever is first.\*2)  
Also, the product may have specified durability, running distance or replacement parts. Please consult your nearest sales branch.
2. For any failure or damage reported within the warranty period which is clearly our responsibility, a replacement product or necessary parts will be provided.  
This limited warranty applies only to our product independently, and not to any other damage incurred due to the failure of the product.
3. Prior to using SMC products, please read and understand the warranty terms and disclaimers noted in the specified catalog for the particular products.

#### \*2) Vacuum pads are excluded from this 1 year warranty.

A vacuum pad is a consumable part, so it is warranted for a year after it is delivered.  
Also, even within the warranty period, the wear of a product due to the use of the vacuum pad or failure due to the deterioration of rubber material are not covered by the limited warranty.

### Compliance Requirements

1. The use of SMC products with production equipment for the manufacture of weapons of mass destruction (WMD) or any other weapon is strictly prohibited.
2. The exports of SMC products or technology from one country to another are governed by the relevant security laws and regulations of the countries involved in the transaction. Prior to the shipment of a SMC product to another country, assure that all local rules governing that export are known and followed.

### Caution

#### SMC products are not intended for use as instruments for legal metrology.

Measurement instruments that SMC manufactures or sells have not been qualified by type approval tests relevant to the metrology (measurement) laws of each country. Therefore, SMC products cannot be used for business or certification obtained by the metrology (measurement) laws of each country.

### Revision History

- Edition B**
- \* The PF2M701, 702, and 705 have been added.
  - \* A female thread type has been added.
  - \* The IO-Link compatible PF2M7-L series has been added.
  - \* Internal circuits and wiring examples have been revised.
  - \* A made-to-order option (Compatible with argon (Ar) and carbon dioxide (CO<sub>2</sub>) mixed gas) has been added.
  - \* Number of pages has been increased from 20 to 28.

YU

## Safety Instructions

Be sure to read the “Handling Precautions for SMC Products” (M-E03-3) and “Operation Manual” before use.



[www.smc.com.mx](http://www.smc.com.mx)

SMC Corporation (México) S.A. de C.V.  
[informacion.tecnica@smcmx.com.mx](mailto:informacion.tecnica@smcmx.com.mx)

© 2020 SMC CORPORATION MEXICO. Derechos Reservados

Todas las especificaciones incluidas en este catálogo están sujetas a cambio sin previo aviso.

